

TOGGLE (SNAP) SWITCH

雙投開關

CHARACTERISTICS: 性能

Contact resistance: 50mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500VDC)


Dielectric strength: 1000VAC 50/60Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rubber Cap. TR-1 防水套

(Available for Series of T11 ~ T23)

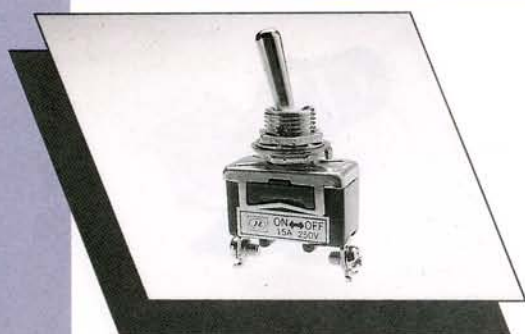

T-11A 2P ON-OFF SPST

T-11B 2P ON-OFF SPST

Rating: 10A 250VAC



T-11AS 2P ON-OFF SPST

T-11BS 2P ON-OFF SPST

Rating: 15A 250VAC

TERMINAL:

A	SOLDER
B	SCREW

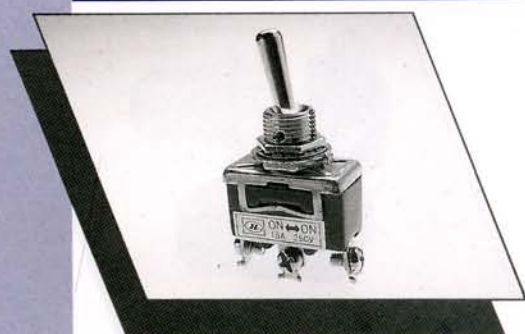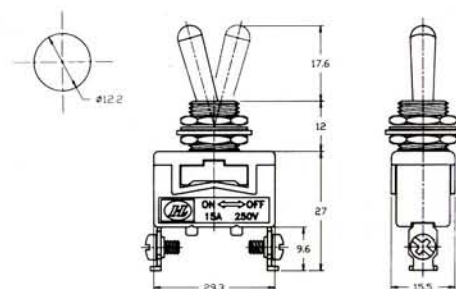

T-12A 3P ON-ON SPDT

T-12B 3P ON-ON SPDT

Rating: 10A 250VAC


T-12AS 3P ON-ON SPDT

T-12BS 3P ON-ON SPDT

Rating: 15A 250VAC

TERMINAL:

A	SOLDER
B	SCREW

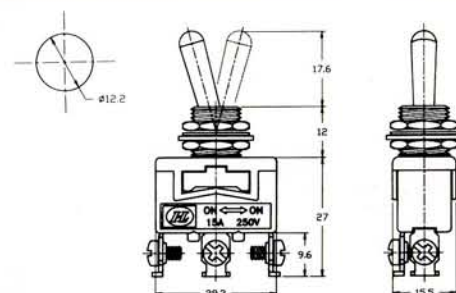

T-13A 3P ON-OFF-ON SPDT

T-13B 3P ON-OFF-ON SPDT

Rating: 10A 250VAC


T-13AS 3P ON-OFF-ON SPDT

T-13BS 3P ON-OFF-ON SPDT

Rating: 15A 250VAC

TERMINAL:

A	SOLDER
B	SCREW

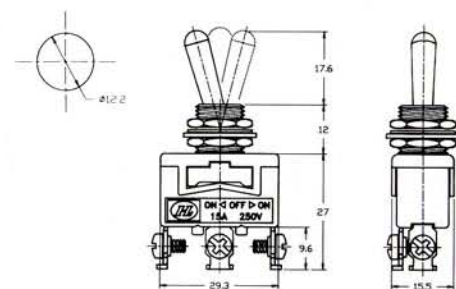

T-21A 4P ON-OFF DPST

T-21B 4P ON-OFF DPST

Rating: 10A 250VAC


T-21AS 4P ON-OFF DPST

T-21BS 4P ON-OFF DPST

Rating: 15A 250VAC


TERMINAL:

A	SOLDER
B	SCREW

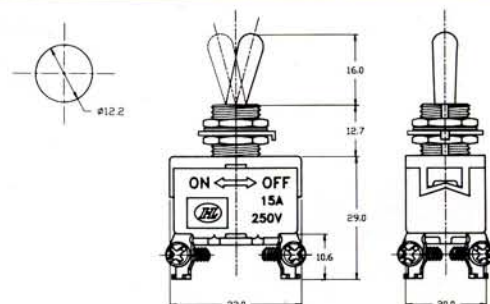

TOGGLE (SNAP) SWITCH

雙投開關

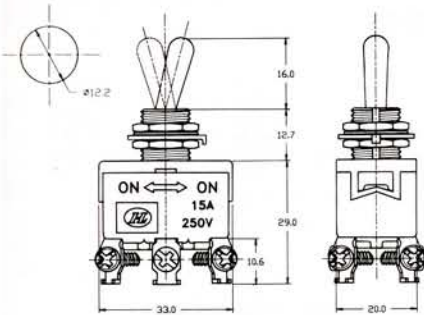

T-22A 6P ON-ON DPDT

T-22B 6P ON-ON DPDT

Rating: 10A 250VAC


T-22AS 6P ON-ON DPDT

T-22BS 6P ON-ON DPDT

Rating: 15A 250VAC

TERMINAL:

A	SOLDER
B	SCREW

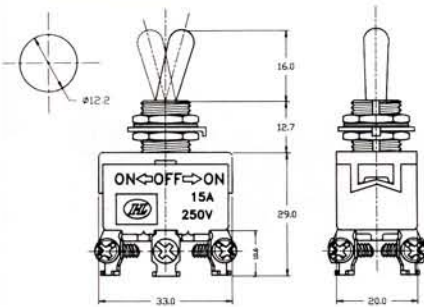

T-23A 6P ON-OFF-ON DPDT

T-23B 6P ON-OFF-ON DPDT

Rating: 10A 250VAC


T-23AS 6P ON-OFF-ON DPDT

T-23BS 6P ON-OFF-ON DPDT

Rating: 15A 250VAC

TERMINAL:

A	SOLDER
B	SCREW





T-36A 4P ON-OFF DPST

T-36B 6P ON-ON DPDT

Rating: 10A, 250VAC

16A, 125VAC

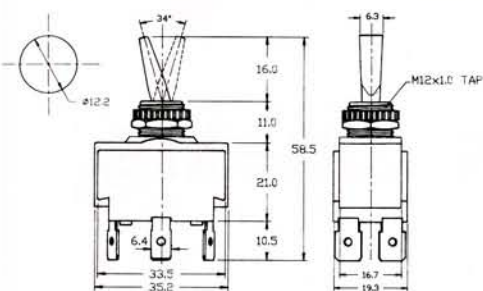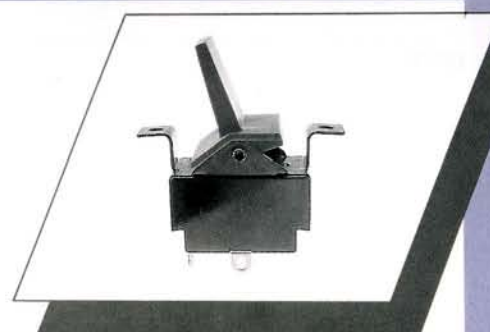

T-35A 2P ON-OFF

T-35AN 2P (ON)-OFF

T-35AL 3P with Lamp ON-OFF

T-35B 3P ON-ON

T-35C 3P ON-OFF-ON

T-35CN 3P (ON)-OFF-(ON)

T-35D 6P ON-ON



T-35E 6P ON-OFF-ON

T-35EN 6P (ON)-OFF-(ON)

Rating: 10A 250VAC

15A 125VAC

()=Momentary

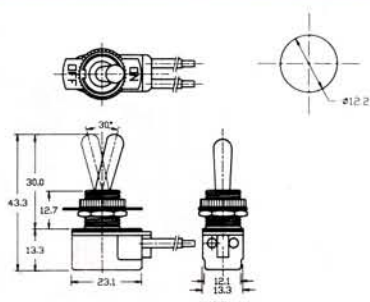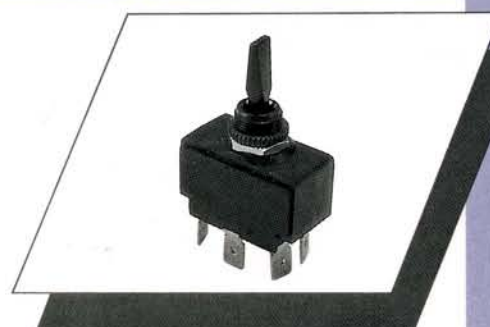

T-41FC (with cable terminal)

T-42BS (screw terminal)

T-43AR (Solder terminal)

2P ON-OFF SPST

Rating: 6A 125VAC

