


Specification of KSD-9700

>>Dimensions

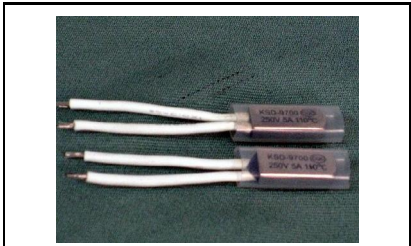


Metal case with silicon rubber tube

Rated functioning temperature (Tf) in ()	40-170
Rated Voltage (V)	250 / 110
Rated Current (A)	10

Auto Reset Temperature Switch

Case Material: Metal

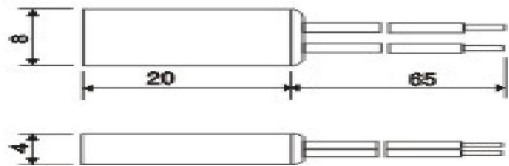

Application: Lighting, Battery, Induction Cooker, Motor, Transformer, Electric Water Heater, Solar Water Heater and Similar Electric Heater etc.

Normality electrical strength: AC50Hz/2000V(hold for second)

Normality insulation resistance :>100MΩ(DC500V tramegg contact internal resistance : <50mΩ ;

Service life: >40000 times (resistive load)

>>Electrical characteristic

Rated functioning temperature (Tf)	Actual functioning temperature (Tf)	Reset temperature	Rated Voltage (Ur)	Rated Current (In)
()	()	()	(V)	(A)
40 ~ 150	Tf±5	Tf-(25 ~ 30)±5	110/250	10