







ST-12 Pushbutton key Switches Illuminated (W/L ED)

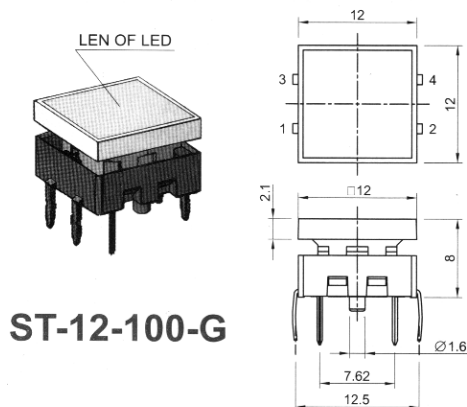


P.C. MOUNTING
LED terminal



CONTACT
CONFIGURATION




COVER STYLE : FC





SPECIFICATION:



CIRCUIT	: SPST
CURRENT RATING	: 50mA@12VDC
LED RATING	: 30VDC 40mA
CONTACT RESISTANCE	: 100mΩ Max.(initial)
INSULATION RESISTANCE	: 100MΩ Min.
OPERATING FORCE	: 250g ± 50g.
TOTAL TRAVEL	: 0.3mm ± 0.1mm.
OPERATING LIFE	: 100,000 Cycles Min.
OPERATING TEMPERATURE	: 10°C to +60°C





COVER STYLE : RC





COVER STYLE : RH





COVER STYLE : UT




COVER STYLE : SC



COVER STYLE : SH



COVER STYLE : C4 or C5



HOW TO ORDER

MODEL NO.	CAP COLOR	LED COLOR	TRANSPARENT COVER STYLE	TRANSPARENCY PAPER
ST-12	1 : Red 2 : Yellow 3 : Green 4 : White 5 : Transparent 6 : Orange 7 : Blue	00 : Without LED 01 : Red 02 : Yellow S2 : Super Yellow 03 : Green S3 : Super Green	00 : Without Cover FC : Flat/clear RC : Round h=4.9mm/clear RH : Round h=6.9mm/clear SC : Square h=4.9mm/clear SH : Square h=6.9mm/clear UT : UP Triangle/clear DT : Down Triangle/clear RT : Right Triangle/clear LT : Left Triangle/clear C5 : Flatcover/clear ※ C4 : Flatcover/white (Solid)	☐ : Non ☐ : Power ☐ : ON/OFF ☐ : ON

Others : For inquire