


CTT-1158 series

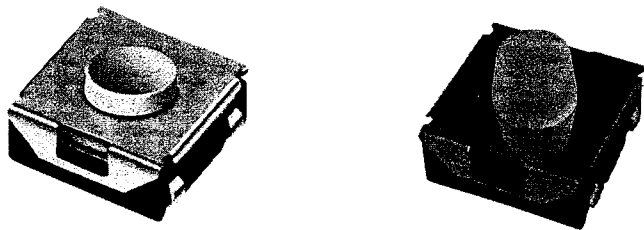

Lead Free

Features

- Dimensions: 6.2×6.2×Knob(L)
- High reliability with sealed contact structure
- Rubber stem material: Soft & overstroke feeling operation
- Proof of dust, humidity & flux

Applications

Remote controller, Auto-tooth brush, Audio, Camera, Hands free sets

CTT-1158 Common Specifications





Rating	DC12V 50mA
Travel	0.25±0.1mm
Contact Resistance	100mΩ Max.
Operating Life	100,000 Cycles Min.

How to order


CTT-1158

Series No.		Knob(L)	Operating Force
	Terminal U Bending		160gf
S10	Terminal S Bending 10mm	A 5.1mm	200gf
S9	Terminal S Bending 9mm	B 2.6mm	250gf
		C 4.3mm	350gf


CTT-1158

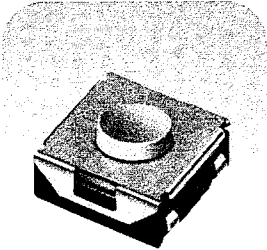





P.C.B. Land Pattern




Circuit Diagram




CTT-1158A

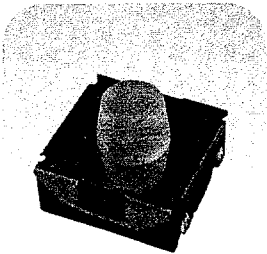




P.C.B. Land Pattern




Circuit Diagram




CTT-1158S

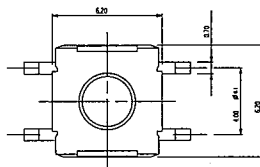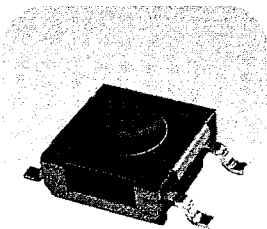




P.C.B. Land Pattern

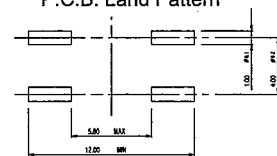


Circuit Diagram



CTT-1158S9

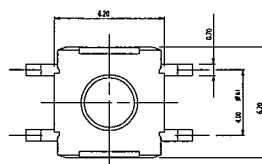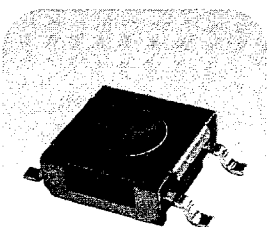

P.C.B. Land Pattern

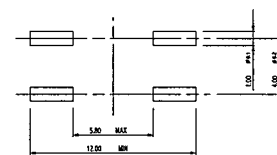

Circuit Diagram

