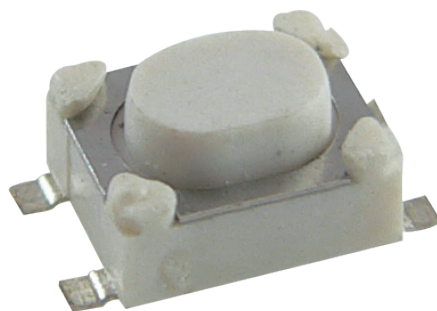



Feature -


SPST
mini in dimension

Application -

consumer products
computer products
instrumentation
communication equipments


SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	MAX. : 12 V DC , 50 mA MIN. : 1 V DC , 50 μ A
CONTACT RESISTANCE	500 m Ω MAX. 5 V DC ; 10 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 M Ω MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	160 $\pm$ 50 gf
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	0.2 $\pm$ 0.10 mm

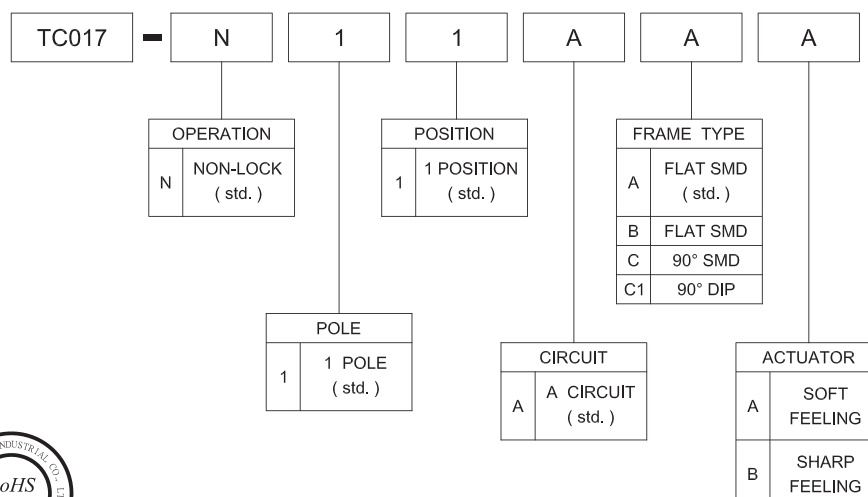
HOW TO ORDER


► DIMENSION


TC017-N11AAA

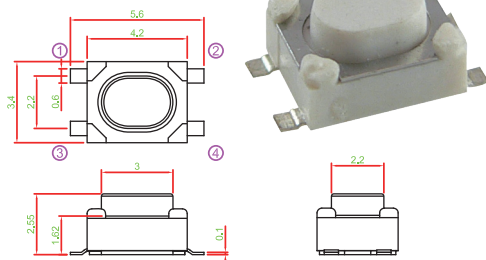


TC017-N11ABB

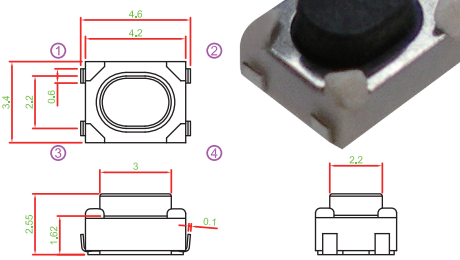


TC017-N11ACA

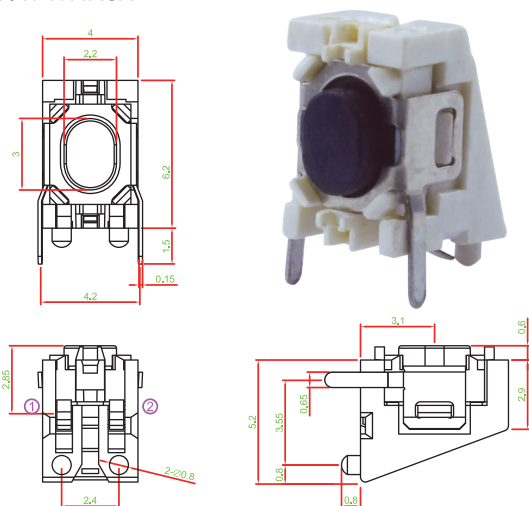


TC017-N11AC1A

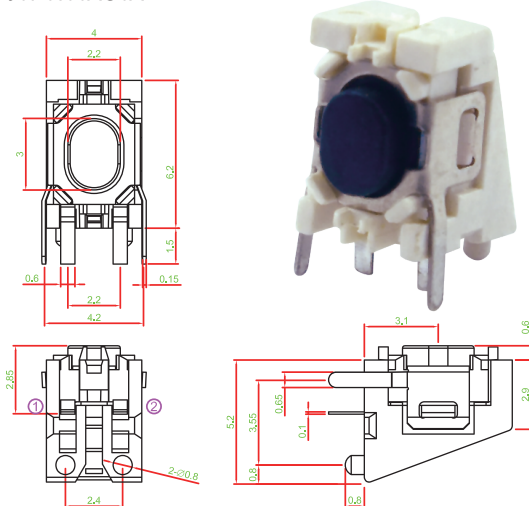


► CIRCUIT



► P.C.B. LAYOUT

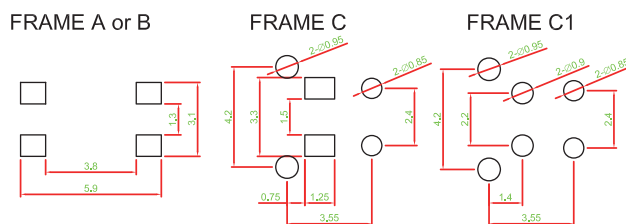

► REFLOW SOLDERING

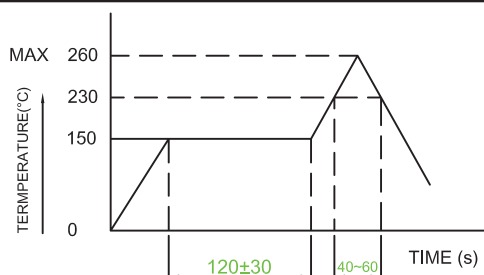

► MATERIAL

- COVER : SUS
- ACTUATOR : LCP
- BASE : LCP
- TERMINAL : BRASS SILVER PLATING