


6-3

키 스위치 (A-Type) Key Switch (A-Type)

■ **YongSung** File No. E242380

형식 구분도 | Type Classification Diagram |

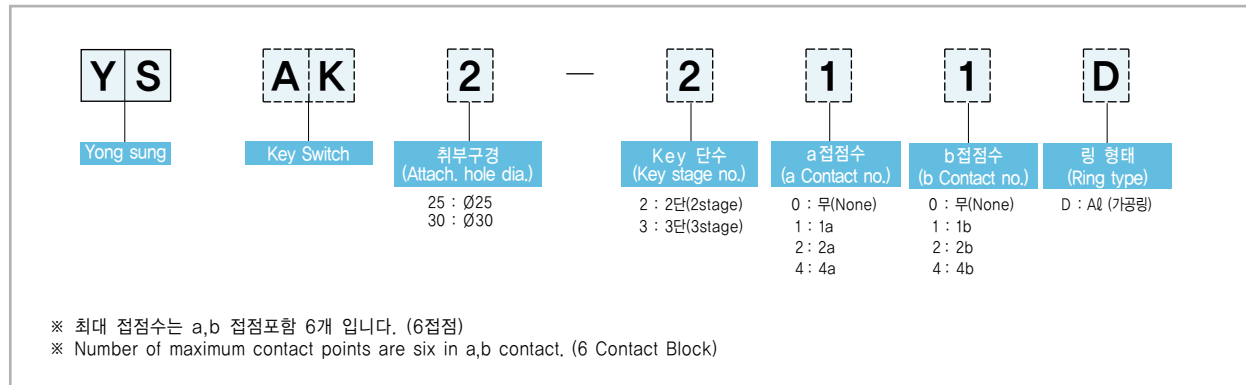

성능 개요 | Performance Summary |

절연저항 (Insulation resistance)	above 100MΩ (DC 500V. Meg)
접촉저항 (Contact resistance)	below 50mΩ (Initial value)
내전압 (Withstand voltage)	AC 2,500V/min (60Hz)
기계적수명 (Mechanical lifetime)	above 500,000 times (20times/min)
전기적수명 (Electrical lifetime)	above 100,000 times (20times/min)
사용주위온도 (Ambient temperature)	-25 ~ +40℃
상대습도 (Relative humidity)	45 ~ 85%

접점 정격 | Contact Rating |

정격절연전압 (Rating insulation voltage)		AC600V, DC250V		
정격통전전류 (Thermal continuous test current)		10A		
AC	정격사용전압 (Rated votage)	110V	220V	440V
	저항부하 (Resistive load)	10A	6A	3A
	유도부하 (Inductive load)	5A	2.5A	1.2A
DC	정격사용전압 (Rated votage)	110V	125V	220V
	저항부하 (Resistive load)	2.2A	1.9A	1.1A
	유도부하 (Inductive load)	1.1A	1.0A	0.6A

Key 동작 방향 | Key Operating Direction |

2단 (2 stage)	3단 (3 stage)

외형 / 치수도 | Shape / Dimension Drawing | (unit : mm)

Ø25

PANEL 1.0~6.0

46.8

14.0 20.0 4.6 (Max)

20+(20.0 x n) 최대동작거리
(n=하부수) (Contact Block Number)

Ø30

PANEL 1.0~6.0

46.8

14.0 20.0 4.6 (Max)

20+(20.0 x n) 최대동작거리
(n=하부수) (Contact Block Number)

Key 빠지는 위치 | Key Release Position |

2단 (2 stage)		3단 (3 stage)		
Left	Right	Left	Center	Right