

형식 구분도 | Type Classification Diagram - LED Type |

Y S	P L	2	—	A L	1 1	R	W
Yong Sung	표시등 (Pilot Lamp)	취부구경 (Attach. dia.)		사용방식 (Using method)	정격전압 (Rating voltage)	LED색상 (LED color)	방수등급 (Waterproof grade)
		2 : Ø25 3 : Ø30		AL : AC LED DL : DC LED	24 : AC/DC24V 48 : AC/DC48V 11GPT 11 : AC/DC110V 12 : AC120V/DC125V 22 : AC/DC220V 38 : AC380V 44 : AC440V	R : 적 (Red) Y : 황 (Yellow) G : 녹 (Green) W : 백 (White) O : 오렌지 (Orange) N : 청 (Navy blue)	W : IP 56 (25Ø,30Ø) 무표시 : 일반 (no mark : general)

※ DC용은 surge 전압발생우려가 있는 곳에 사용시 사전대책이 필요합니다. (기술자료참조)

(As use for DC can exist to surge voltage, protective action is necessary before use, (Refer to technical data.))




※ IP 56 방수 : 주문 생산품 (IP 56 waterproof : Ordered production.)

※ 11GPT : GPT 3차 전압용 램프 (11GPT : GPT 3rd Lamp for Voltage)




외형 / 치수도 | Shape / Dimension Drawing |

(unit : mm)




YS PL2 (Ø25)



YS PL2-O (Ø25)



YS PL3 (Ø30)



7

표시등류
LAMPS

■  For use on a flat surface of a type 1 enclosure
File No. E242380

■ 

7-1 원형 표시등 (Pilot Lamp)

7-2 표시등 (APL Ø16) (Lamp (APL Ø16))

7-3 정사각 표시등 (SL-25) (Square Lamp (SL-25))

7-4 정사각 표시등 (SL-33, BSL-33) (Square Lamp (SL-33, BSL-33))

7-5 직사각 기명 표시등 (NRL-34, BRL-34) (Bulletin Rectangle Lamp (NRL-34, BRL-34))

7-6 사각 LED 표시등 (SL-48, SL-72, ASL-48) (Square LED Lamp (SL-48, SL-72, ASL-48))


7-1

원형 표시등
Pilot Lamp

■  File No. E242380

■ 

형식 구분도 | Type Classification Diagram - BULB Type |

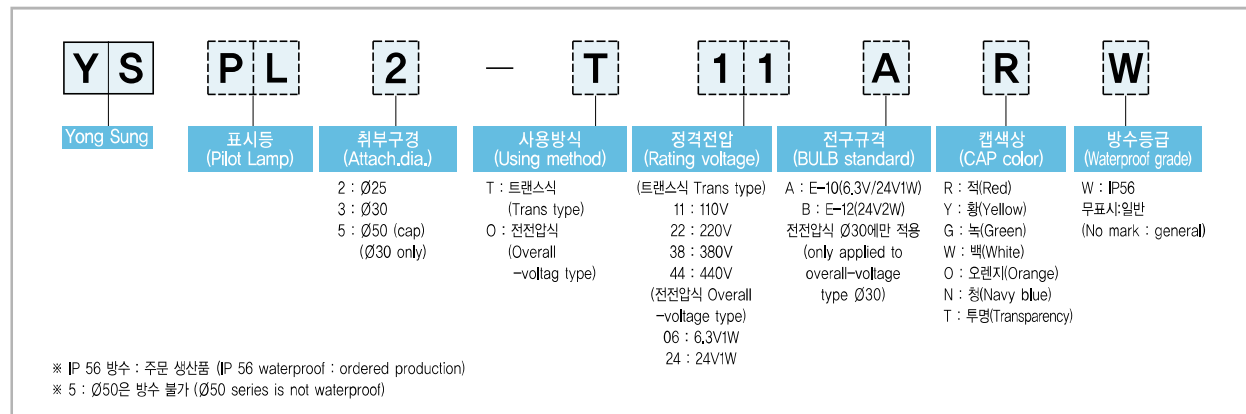

부품 재질 | Part Materials |

부품 (Part)	재질 (Materials)
몸체 (Body)	PC 수지 (Polycarbonate resin)
홀더 (Holder)	ABS 내열 수지 (Heat resistance ABS resin)
단자 (Terminal)	황동 (Brass)
볼트 (Bolt)	탄소강 (Carbon steel)
캡 (CAP)	AS 수지 (AS resin)
링 (Ring)	ABS 수지 (ABS resin)