


형식 구분도 | Type Classification Diagram

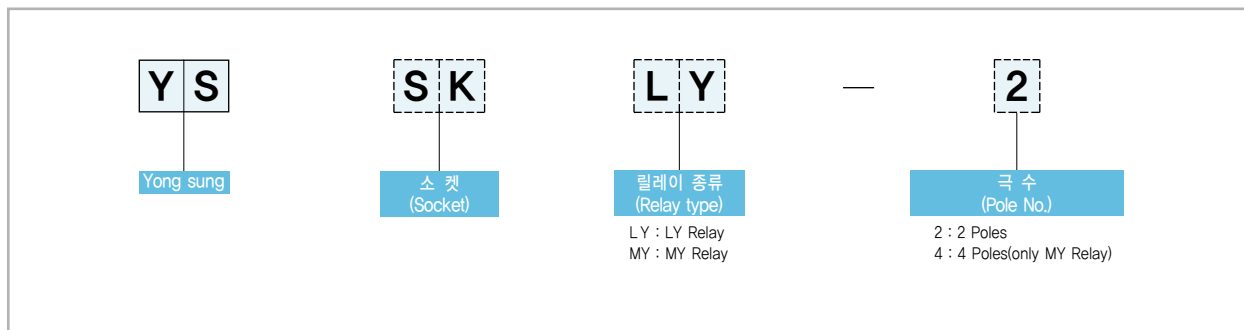

부품 재질 | Part Materials

부 품 (Part)	재 질 (Materials)		
	SK MY-2	SK MY-4	SK LY-2
UPPER CASE	ABS난연 (Frame Retardant ABS Resin)		
UNDER CASE			
소켓단자 (Socket Terminal)	인청동 (Phosphor Bronze) – Ni Plating		
단 자 (Terminal)	탄소강 (Carbon Steel) – Zn Plating		
볼 트 (Bolt)	탄소강 (Carbon Steel) – Zn Plating		



성능 개요 | Performance Summary

항 목 (Item)	성 능 (Performance)
절연저항 (Insulation resistance)	above 100MΩ (DC 500V, Meg)
내전압 (Withstand voltage)	AC 2,000V/min(50~60Hz)
정격절연전압 (Rating Insulation voltage)	AC/DC 250V
사용주위온도 (Ambient temperature)	-25℃ ~ +40℃
상대습도 (Relative humidity)	MAX. 90%



외형 / 치수도 | Shape / Dimension Drawing

(unit : mm)

YSSK MY-2

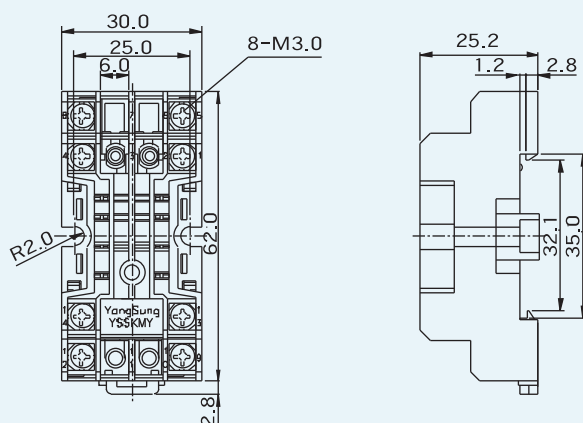

YSSK MY-4

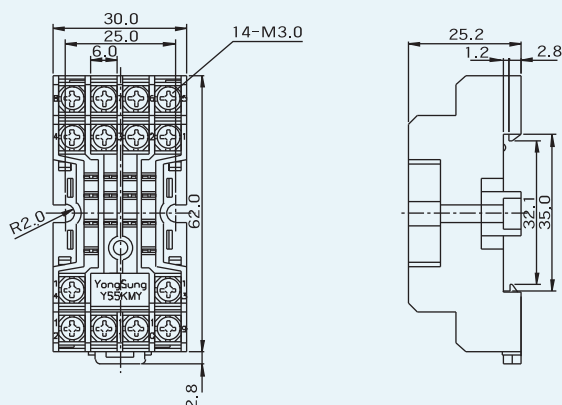

YSSK LY-2

