



*開關產品未經SWITRONIC同意，請勿拆解，否則無法負品質及安全責任。
Please do not decompose the switch without any permission from SWITRONIC, otherwise the quality and safety responsibility could not be guaranteed.

*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.





RoHS compliant

MOUNTING HOLE

Panel thickness	X
0.75 - 1.25	19.2
1.25 - 2.0	19.4
2.0 - 3.0	19.6



SCHEMATIC

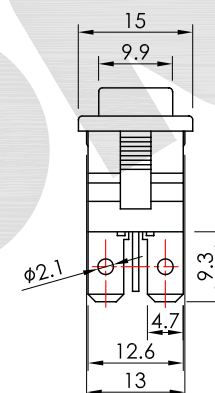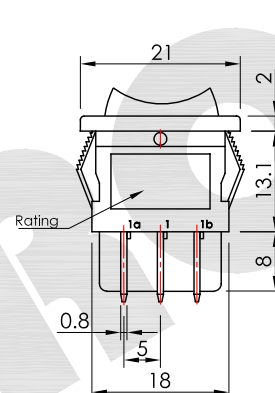

MARKING
refer to our catalog

JS-606QXXXXT-G

Function	
B2	ON-ON
C2	ON-OFF-ON
H2	ON-OFF-(ON)

HOUSING COLOR	
B	Black
W	White
G	Gray

ROCKER COLOR	
B	Black
R	Red
W	White
G	Gray

RoHS compliant



SPECIFICATION

Rating: 10A 125V AC T105.(UL C-UL)
6(2)A 250V AC T125 / 55 1E4.(ENEC SEMKO)

Circuit: DPDT.

Function: ON-OFF-ON.

Contact resistance: 30mΩ Max.(initial)

Insulation resistance: 100MΩ Min. at 500V DC.

Withstand voltage: 1,500V AC for 1 minute.

Operating temperature: -10 ~ +60°C.

Operating force: 400 ~ 900g.

Electrical life: 10,000 Cycles.

Note1: Unwashable, don't be immersed by epoxy and organic solvent.

Note2: Please check the actual size, do not scale the drawing page.

MATERIAL

Housing: Nylon #66 UL-94V-2.

Rocker: Nylon #66 UL-94V-2.

Terminal: Copper alloy, Ag plated.

Contact: AgSnO₂In₂O₃(10) / Cu.

V2.0	無	新繪製	2015.08.28
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品 PRODUCT	Rocker Switch		型號 MODEL NO.	JS-606QC2BBET-G	
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY	單位 UNIT	mm	
Peter Kuo	Chuck Young	Margaret Lee	比例 SCALE	1 : 1	
			公差 TOLERANCE	.X=±0.3mm .XX=±0.2mm	

SWITRONIC
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號13樓之3
13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN
TEL : 886-2-27290229 (Rep.) FAX : 886-2-27582086
URL : <http://www.switronic.com.tw>
E-MAIL : switches@ms36.hinet.net