
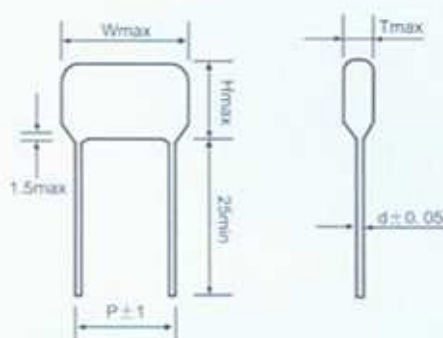


CL21 METALLIZED POLYESTER FILM DC CAPACITOR

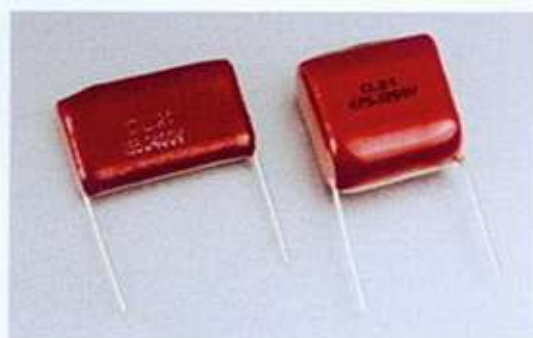

Features

Feature: Constructed with metalized polywster film as medium ad electric code, out warped and zsealed by flame-retardant di-electric, with high reliability, high temperature-resistance, small cubage, large capac-ity and good self-heating property.

Uses: Largely used in color tv, program-controlled exchange machine, computer, telephone, fax and the instrumental circuit for the purpose of DC, impulse and AC at low voltage.

Specifications

引用标准	Reference Standard	GB7332-1996 (IEC384-2)
使用温度	Operating Temperature	-40℃~+105℃
容量范围	Capacitance Range	0.01 ~10μF
允许偏差	Capacitance Tolerance	J: (±5%) ;K: (±10%)
额定电压	Rated Voltage	250V,400V,630V
耐电压	Withstand Voltage	1.6U _R 2s(1.5U _R 5s)
损耗角正切	Dissipation Factor	≤1.0%(20℃ 1KHZ)
绝缘电阻	Insulation Resistance	C≤0.33μF ≥15000MΩ; C≤0.33μF ≥5000MS

Dimensions

[illegible]