
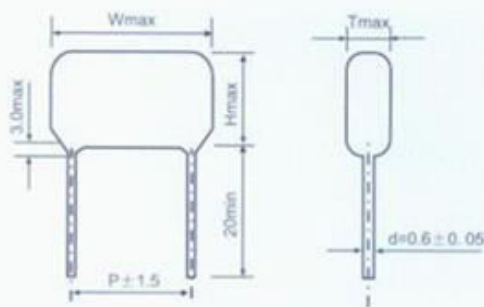


CL21X

微型金属化聚酯薄膜电容器

CL21X MINIATURE-SIZE METALLIZED POLYESTER FILM CAPACITOR

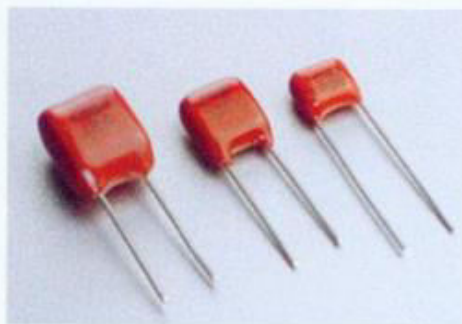

特点与用途

- 1、体积小，可与片式薄膜电容器媲美；
- 2、自愈性好可靠性高；
- 3、损耗小；
- 4、粉末环氧封装，外观一致性好。

Features

- 1、The small size can be compared favorably with stacked Film capacitor;
- 2、Excellent self-healing property and reliability;
- 3、Low dissipation factor;
- 4、Epoxy resin powder coating provides the identical outer appearance.

技术要求

Specifications

引用标准	Reference Standard	GB7332-1996 (IEC384-2)
使用温度	Operating Temperature	-40℃~+105℃
容量范围	Capacitance Range	0.001~1.0μF
允许偏差	Capacitance Tolerance	J:(±5%);K:(±10%);M:(±20%)
额定电压	Rated Voltage	50/63V,100V
耐电压	Withstand Voltage	1.6UR(5s)
损耗角正切	Dissipation Factor	≤0.01(20℃ 1KHZ)
绝缘电阻	Insulation Resistance	≥30000MΩ

外形尺寸

Dimensions

R.V	50/63VDC								100VDC							
	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
Cap(μF)																
0.0010	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.0015	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.0022	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.0033	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.0039	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.0047	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.0068	7.5	7.5	3.5	5.0					7.5	7.0	4.0	5.0				
0.010	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.0	4.0	5.0	10.0	8.0	4.5	7.5
0.015	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.0	4.0	5.0	10.0	8.0	4.5	7.5
0.018	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.0	4.0	5.0	10.0	8.0	4.5	7.5
0.022	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.0	4.0	5.0	10.0	8.0	4.5	7.5
0.027	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.0	4.0	5.0	10.0	8.0	4.5	7.5
0.03	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.0	4.0	5.0	10.0	8.0	4.5	7.5
0.039	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.5	4.5	5.0	10.0	8.0	4.5	7.5
0.047	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	7.5	4.5	5.0	10.0	8.0	4.5	7.5
0.068	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	8.0	4.5	5.0	10.0	8.0	4.5	7.5
0.10	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	9.5	4.5	5.0	10.0	8.0	4.5	7.5
0.15	7.5	7.5	3.5	5.0	10.2	8.0	4.5	7.5	7.5	9.0	4.5	5.0	10.0	8.0	4.5	7.5
0.22	7.5	7.5	4.3	5.0	13.0	9.0	4.5	10.0	10.0	9.5	4.5	7.5				
0.33	7.5	8.5	4.0	5.0	13.0	9.5	5.0	10.0	10.0	11.5	5.0	7.5				
	7.5	7.0	4.5	5.0	13.0	10.0	5.0	10.0	11.0	12.5	5.5	7.5				
0.47	7.5	8.0	4.0	5.0	13.0	10.0	5.0	10.0	11.0	12.0	6.5	7.5				
	7.5	7.0	5.0	5.0	13.0	10.0	5.0	10.0	11.0	12.0	7.5	7.5				
	7.5	8.0	4.5	5.0	13.0	10.5	5.5	10.0	11.0	13.5	8.5	7.5				
0.68	7.5	10.0	5.7	5.0	13.0	12.0	6.5	10.0								
1.0	7.5	7.0	5.5	5.0	13.0	13.0	7.5	10.0								

