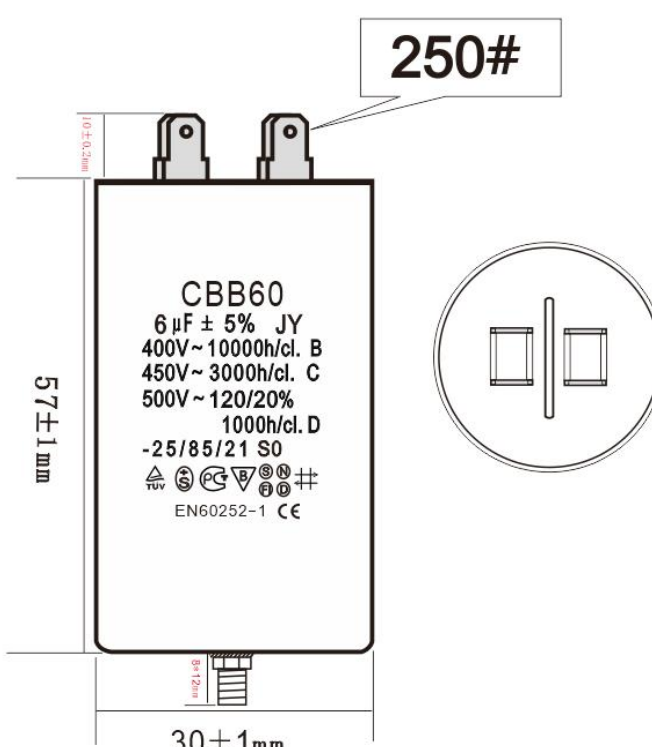


Customer ' s name						Customer recognizes		
客户名称：						客户确认：		
NO.	Specified voltage and frequency		Specifiedcapacity and capacity deviation		Over all dimension	Remark		
序号	额定电压及频率		额定电容量		外形尺寸（mm）	备注		
1	450VAC 50/60Hz		2µF±5%		φ 30×57M8			
2	450VAC 50/60Hz		3µF±5%		φ 30×57M8			
3	450VAC 50/60Hz		6µF±5%		φ 30×57M8			
Carry out standard		GB/3667. 1-2016/IEC60252-1： 2013						
执行标准								
Operating temp range		（-25 ~ +85℃）	Lifespan garden		C			
使用温度范围			寿命等级					
Withstanding standard		Between terminals	2. 0UN 2S无击穿及飞弧现象					
耐电压	端子相互间		2times working voltage ,no breakdown within 2 seconds					
	Terminals to case		2KVC/2S					
	端子与外壳间（金属外壳）							
Capacitance tolerance		±5%						
电容偏差								
Loss angle tangent		≤ 0.0015（1000 Hz）						
损耗角正切								
整体	Shape	See right picture					drafts system:	Name.: CBB60 metallized polypropylene film capacitor.
	外形	见右图						
	Condenser fuse	Have self-healing						名称：CBB60型金属化聚丙烯薄膜电容器
	电容器芯子	具有自愈性						
	Case	White of plastics outer shell						拟 制：胡苏安
	外壳	PP白壳						
	Terminals	250# Terminal 2+2					Approval	
	引出	2+2插片						
	Filling	Epoxy resin					核 准：	
	填充料	环氧树脂						

ALLCONNE INTERNATIONAL CO.,LIMITED.

ADD:612&614,Fuchen Commercial Bldg NO.2,Tongjian Road NO.177 High-new Technology Zone, ChangZhou, China
International Tel: +86-519-86907873 FAX: +86-519-86906166 Website: www.spike-components.com