

MS SERIES

PUSH BUTTON SWITCH



Feature -

0.3A, 30 V DC for Power
1 pole & 2 poles circuitry


Application -

home electronic equipments
industrial electronic equipments
audio system
ADSL modem
wireless AP

► SPECIFICATIONS



SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T , 2P2T , Momentary and Lock Type are Available
CONTACT RATING	30 V DC , 0.3 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable 500 V DC for 1 Minute
OPERATING FORCE	1P2T : 200 ± 100gf 2P2T : 250 ± 100gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	3.5 ± 0.3 mm

► HOW TO ORDER

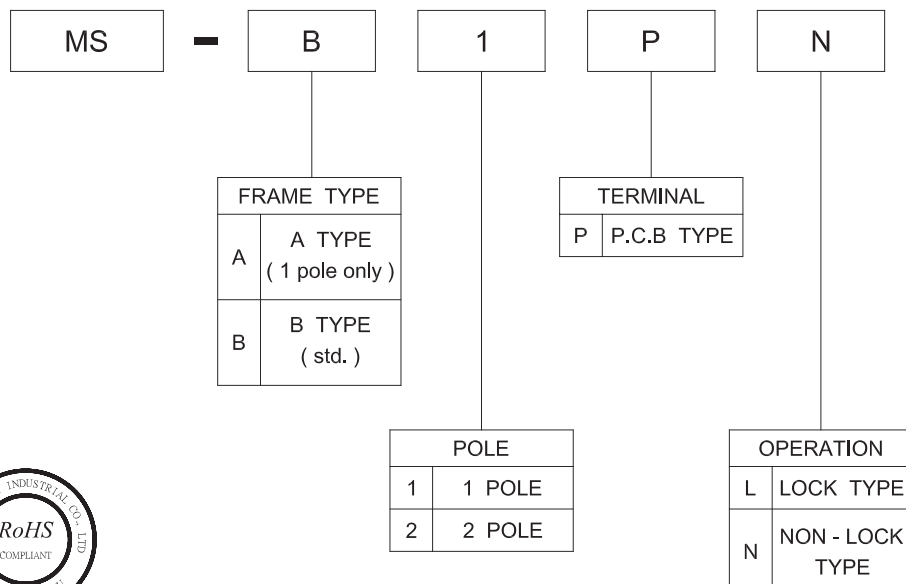


► DIMENSION

MS - A1PL

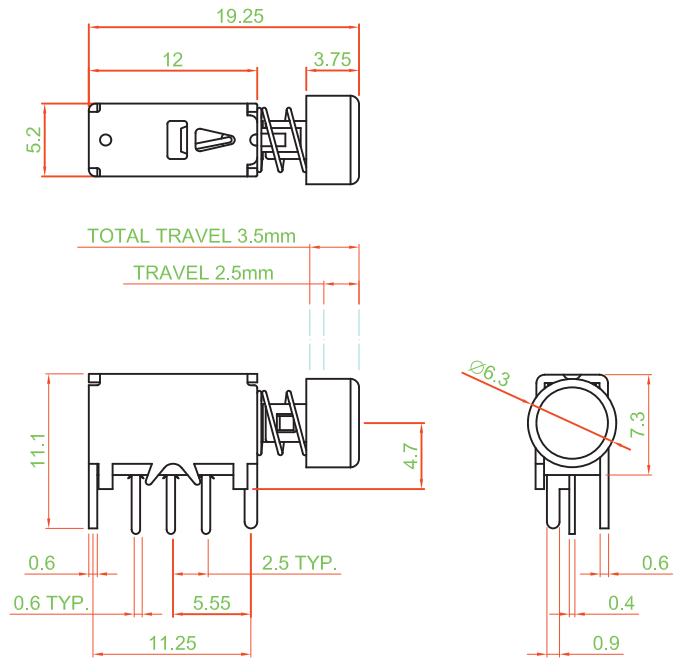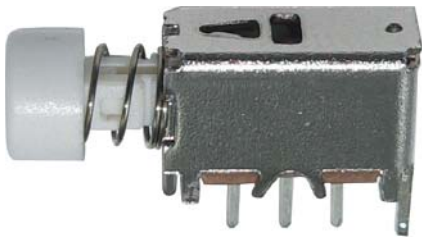

MS - B1PN


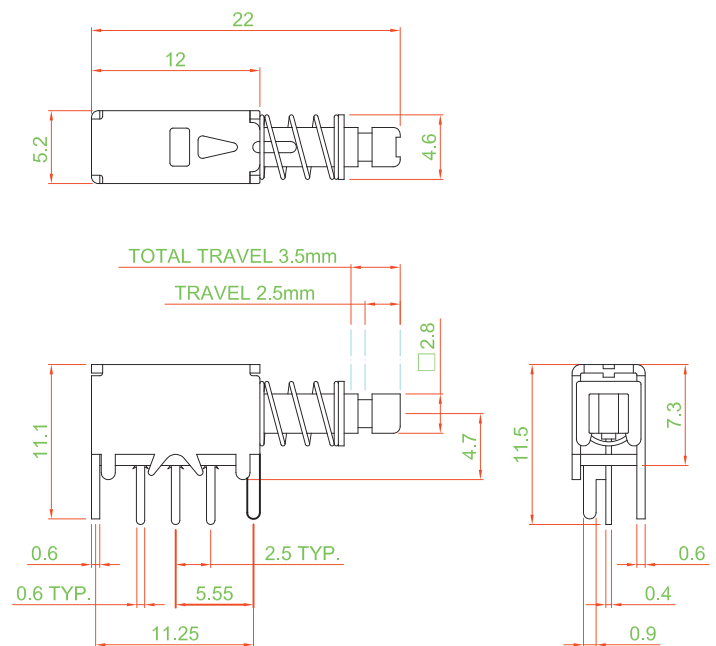


MS SERIES

PUSH BUTTON SWITCH


► DIMENSION

MS - B2PL

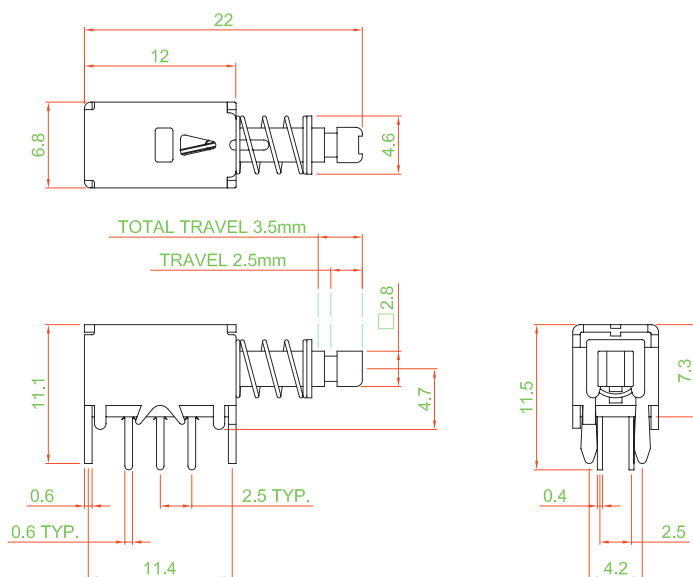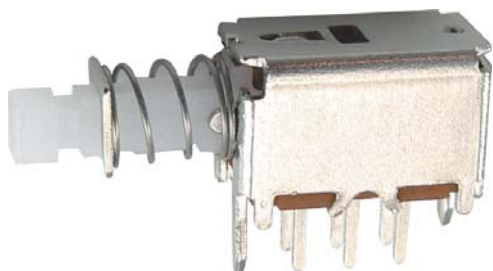


► CIRCUIT

MS - B1PN




► P.C.B LAYOUT


MS - B1PN



MS - B2PN



MS - B2PN



► MATERIAL

■ ACTUATOR : PA + GF

■ FRAME : STEEL PLATE

■ TERMINAL :
BRASS SILVER PLATING

■ SPRING : STAINLESS STEEL

► UNIT WEIGHT

■ MS - B1PN : 1.4 ± 0.05 g / pc

■ MS - B2PN : 1.8 ± 0.05 g / pc