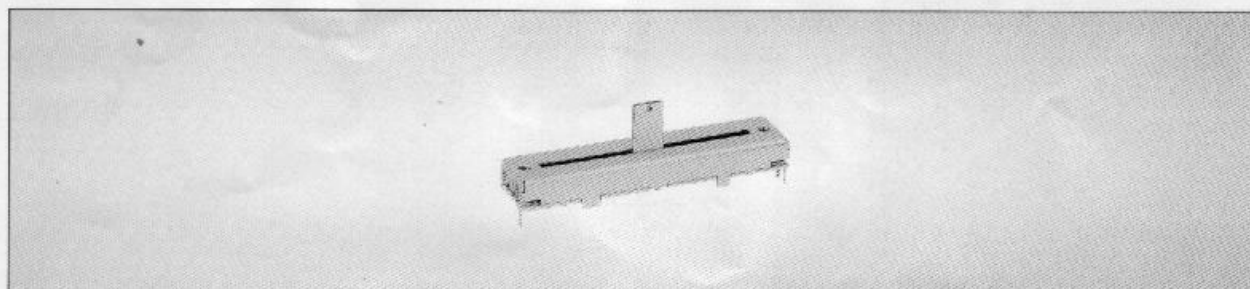


SOFT FEELING TYPE SLIDE POTENTIOMETERS



■ Features

- Fader control for studio mixer provides an excellent operation feeling and high-precision characteristics (gang error, taper, etc.)
- Lever supported with two columns to minimize lever wobble and offer better operational feel.
- Low-profile design-only 9mm high
- Long-life type has realized for 300,000 times sliding life

■ Applications

- Master volume control in high-grade audio equipment, fader for studio mixer, etc.

■ Mechanical characteristics


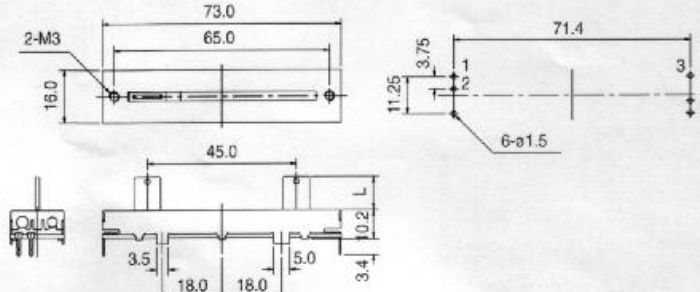

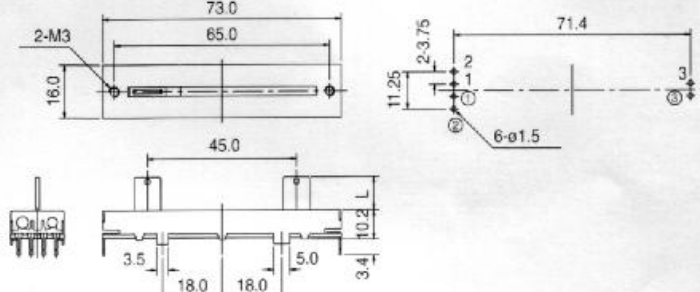

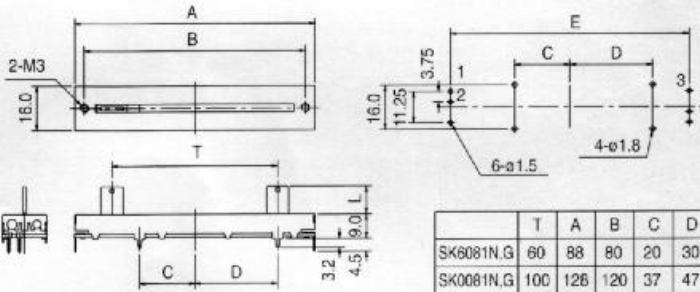

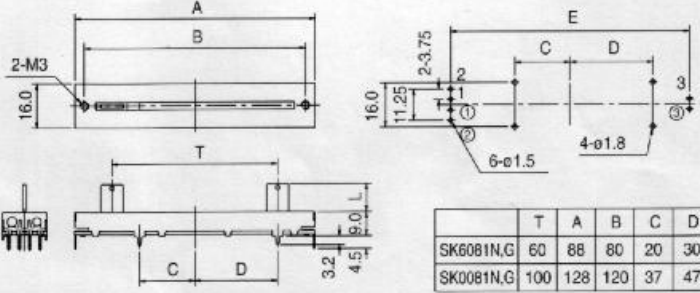



Item	SK 81	
	Single-unit	Dual-unit
Operating force	5~50gf.cm	
Lever stopper strength	10kgf.cm	
Lever wobble	2(2 x L)/25mm max.	
Lever push-pull strength	10kgf	

■ Electrical characteristics

Total resistance	5K~1MΩ	
Total resistance tolerance	±20%	
Resistance taper	A,B,C,D	
Ratings power	B taper 0.5W Other than B taper 0.25W	
Maximum operating voltage	B taper 200V AC Other than B taper 150V AC	
Sliding noise	68mV max. at 20mm/sec. (When Voltage rating < 20V, use the rated voltage)	
Gang error	_____	3dB max. (-60~0dB)
Insulation resistance	100MΩ min. at 250V DC	
Voltage proof	1 minute at 300V AC	
Sliding life	300,000 cycles	

SOFT FEELING TYPE SLIDE POTENTIOMETERS

■ Soft Feeling Type Slide Potentiometers

Model	Dimensions																					
SK4581N Soft Feeling Type Single-unit	 																					
SK4581G Soft Feeling Type Dual-unit	 																					
SK□□81N T Soft Feeling Type Single-unit	  <table><tr><td></td><td>T</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td>SK6081N,G</td><td>60</td><td>88</td><td>80</td><td>20</td><td>30</td><td>87.5</td></tr><tr><td>SK0081N,G</td><td>100</td><td>128</td><td>120</td><td>37</td><td>47</td><td>127.5</td></tr></table>		T	A	B	C	D	E	SK6081N,G	60	88	80	20	30	87.5	SK0081N,G	100	128	120	37	47	127.5
	T	A	B	C	D	E																
SK6081N,G	60	88	80	20	30	87.5																
SK0081N,G	100	128	120	37	47	127.5																
SK□□81G T Soft Feeling Type Dual-unit	  <table><tr><td></td><td>T</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td>SK6081N,G</td><td>60</td><td>88</td><td>80</td><td>20</td><td>30</td><td>87.5</td></tr><tr><td>SK0081N,G</td><td>100</td><td>128</td><td>120</td><td>37</td><td>47</td><td>127.5</td></tr></table>		T	A	B	C	D	E	SK6081N,G	60	88	80	20	30	87.5	SK0081N,G	100	128	120	37	47	127.5
	T	A	B	C	D	E																
SK6081N,G	60	88	80	20	30	87.5																
SK0081N,G	100	128	120	37	47	127.5																
RK□□81 Type of Lever (Metal lever)																						
A Lever Type 	B Lever Type 	T Lever Type 																				



COMMON SPECIFICATION

