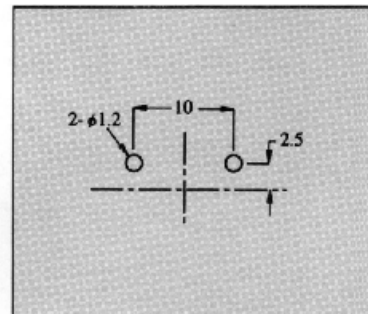
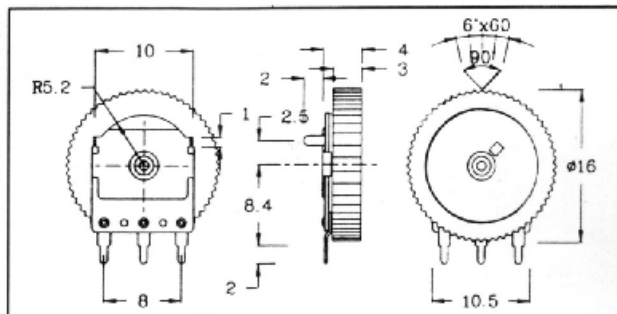


RV 016N3

SPECIFICATIONS 特性

ELECTRICAL 電器特性

RESISTANCE RANGE 阻值範圍	1K Ω - 1M Ω
RESISTANCE TOLERANCE 阻值誤差	$\pm 20\%$
RESISTANCE TAPER 電阻規律	A. B. C. D. W
RESIDUAL RESISTANCE 殘留電阻 Between Terminal 1 & 2 Between Terminal 2 & 3	20 Ω /20 Ω
POWER RATING 額定功率	0.05W
INSULATION RESISTANCE 絕緣電阻	100M Ω Min at 100V DC
WITHSTAND VOLTAGE 耐電壓	1 Min at 100V AC


MECHANICAL 機械特性

ROTATION ANGLE 旋轉角	270° $\pm$ 5°
ROTATIONAL TORQUE 旋轉力矩	10 - 50 gf. cm
STOP STRENGTH 止擋強度	0.8 Kgf. cm
PUSH - PULL STRENGTH 推拉強度	Puah : 0.5 Kgf Pull : 0.2Kgf
SHAFT WOBBLE 滑柄振幅	0.2mm
ROTATIONAL NOISE 轉動噪音	100 (Mv)


DURABILITY 耐用性

ROTATIONAL LIFE 旋轉壽命	10,000 Cycles
----------------------	---------------

$$\frac{\text{OUTPUT VOLT ACROSS TERM 1 - 2}}{\text{INPUT VOLT ACROSS TERM 1 - 3}} \times 100\%$$

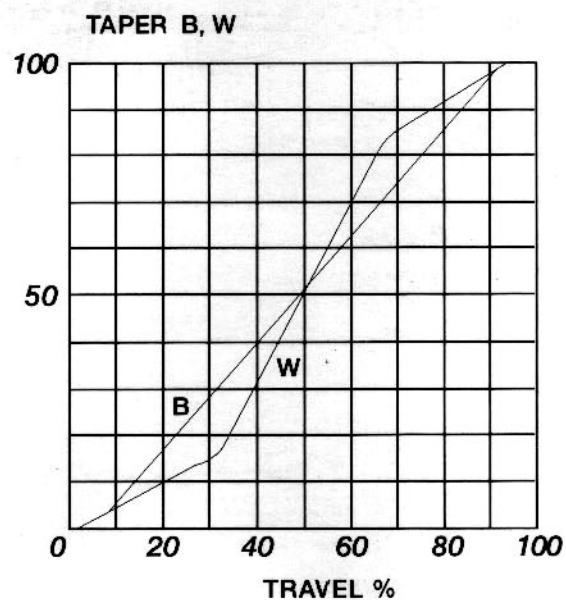

$$\frac{\text{OUTPUT VOLT ACROSS TERM 1 - 2}}{\text{INPUT VOLT ACROSS TERM 1 - 3}} \times 100\%$$

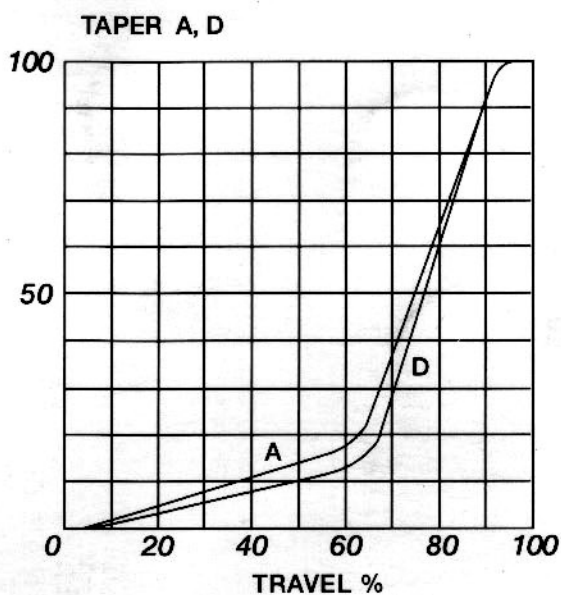

$$\frac{\text{OUTPUT VOLT ACROSS TERM 2 - 3}}{\text{INPUT VOLT ACROSS TERM 1 - 3}} \times 100\%$$

