



Film Polyester Capacitors



HIGH MOISTURE RESISTANCE, GOOD SOLDERABILITY, AVAILABLE ON TAPE&REEL, LOW ESR, MINI SIZE

1. OPERATING TEMPERATURE $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
2. CAPACITANCE RANGE $0.001 \sim 0.47\mu\text{F}$
3. CAPACITANCE TOLERANCE 5%, 10%, 20%
4. RATED VOLTAGE 50/100VDC, 200VDC, 400VDC, 630VDC, 1000VDC
5. DISSIPATION FACTOR 0.75%MAX AT 1KHz, 25°C
6. INSULATION RESISTANCE $\geq 30,000\text{M}\Omega$ AT 25°C

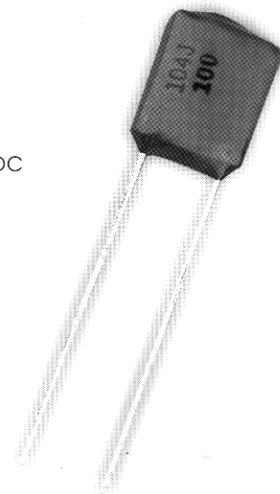

Dimensions-Millimeters

RV	50/100 VDC				200 VDC				400 VDC			
μF	W	H	T	P	W	H	T	P	W	H	T	P
0.001	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0012	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0015	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0018	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0022	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0027	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0033	5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0039	6.0	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0047	6.5	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	6.0	4.0
0.0056	6.5	10.5	3.5	4.0	7.0	11.0	4.0	4.0	10.0	12.0	6.0	4.0
0.0068	6.5	10.5	3.5	4.0	7.0	11.0	4.0	4.0	10.0	12.0	6.0	4.0
0.0082	6.5	10.5	4.0	4.0	7.0	11.0	4.5	4.0	10.0	12.0	6.0	4.0
0.01	6.5	10.5	4.0	4.0	7.0	11.0	4.5	4.0	10.0	14.0	6.0	5.0
0.012	6.5	10.5	4.0	4.0	7.0	11.0	4.5	4.0	10.0	14.0	6.0	5.0
0.015	7.5	10.5	4.0	4.0	9.0	13.0	5.0	4.0	10.0	14.0	6.0	5.0
0.018	7.5	10.5	4.0	4.0	9.0	13.0	5.0	4.0	10.0	14.0	6.0	6.0
0.022	7.8	10.5	4.5	4.0	9.0	13.0	5.0	4.0	10.0	14.0	6.0	6.0
0.027	7.8	12.0	4.5	5.0	9.0	13.0	5.5	5.0	10.0	14.0	6.0	6.0
0.033	8.0	12.0	4.5	5.0	9.0	13.0	5.5	5.0	12.0	14.0	7.0	7.0
0.039	8.0	12.5	5.0	5.0	11.0	14.0	6.0	5.0	12.0	16.0	7.0	7.0
0.047	9.5	12.5	5.0	5.0	11.0	14.0	6.0	6.0	13.0	16.0	8.0	8.0
0.056	10.0	12.5	5.0	6.0	11.0	14.0	7.0	6.0				
0.068	10.0	12.5	5.5	6.0	12.0	14.0	7.0	6.0				
0.082	10.5	12.5	6.0	7.0	13.0	15.0	8.0	7.0				
0.1	11.5	13.0	6.5	7.0	14.0	15.0	8.0	7.0				
0.12	12.0	13.0	7.0	7.0	14.0	15.0	8.0	7.0				
0.15	12.0	15.0	7.0	7.0	15.0	17.0	8.0	7.0				
0.18	12.0	16.0	7.5	7.0	16.0	18.0	9.0	8.0				
0.22	12.0	16.0	8.0	7.0	18.0	18.0	10.0	8.0				
0.27	12.5	16.0	8.5	7.0								
0.33	13.5	17.0	8.5	8.0								
0.39	14.0	17.0	9.0	8.0								
0.47	15.0	17.0	10.0	8.0								

