

CERAMIC CHIP CAPACITORS NPO (COG) DIELECTRIC

APPLICATION:


NPO (COG) dielectric properties; suited for precision circuits, requiring stable dielectric characteristics:

- * Negligible dependence of capacitance and dissipation factor on time, voltage, and frequency
- * Low-loss (High Q)
- * Predictable linear temperature coefficient
- * No piezoelectric behavior


General Specification

- Operating temperature rang $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Capacitance Range: $0.47\text{pF} \sim 15000\text{pF}$
- Capacitance Tolerance: $\pm 0.25\text{pF}$, $\pm 0.5\text{pF}$, $\pm 1\%$, $\pm 2\%$, $\pm 5\%$, $\pm 10\%$
- Voltage Ratings: 6.3VDC, 10VDC, 16VDC, 25VDC, 50VDC, 100VDC, 200VDC, 250VDC, 500VDC, 1KV, 2KV, 3KV
- Dissipation Factor (1 KHz at 1 MHz, 1 Vrms, 25°C) 0.15% Max
- Insulation Resistance (rated voltage applied at 25°C) $100,000 \text{ M } \Omega$ or $1,000 \text{ } \Omega \cdot \text{F}$ min
- Dielectric strength $> 2.5\text{X WV. DC}$.


ΔC , D.F. VS. Temperature Coefficient

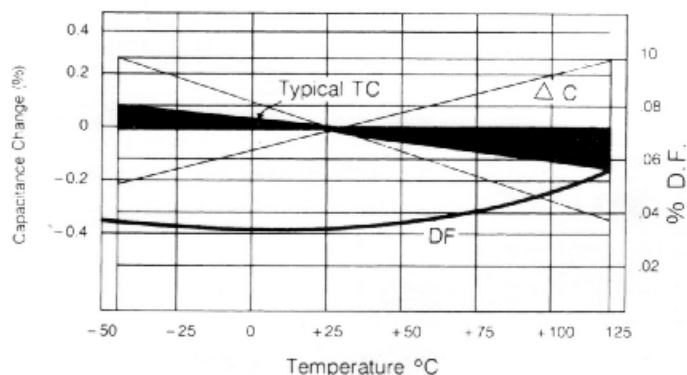


ΔC , VS. Voltage Coefficient

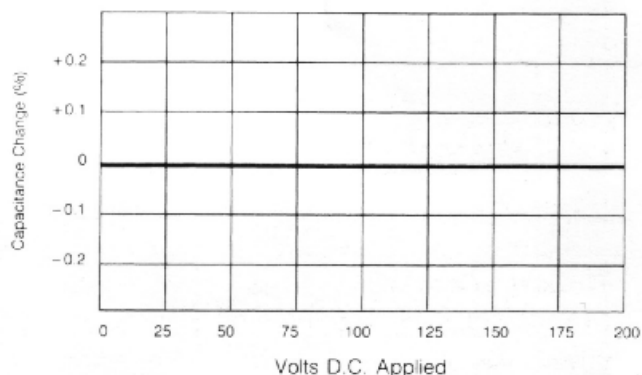

ΔC , D.E. VS. Frequency Coefficient


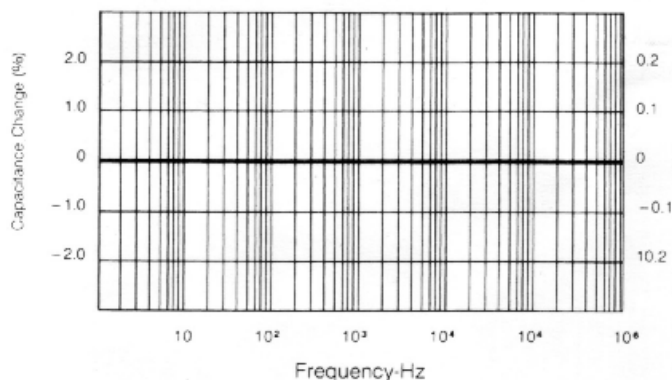


Insulation Resistance VS. Temp.

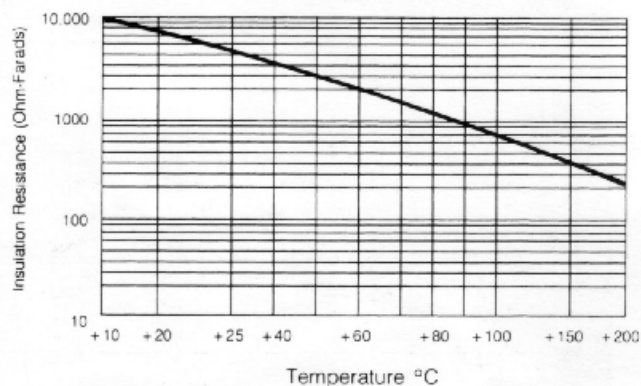

CERAMIC CHIP CAPACITORS NPO (COG) DIELECTRIC

Part Code Designation

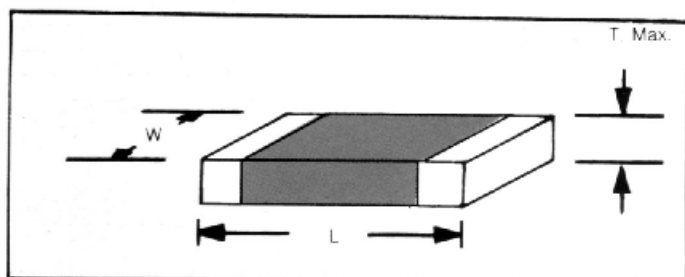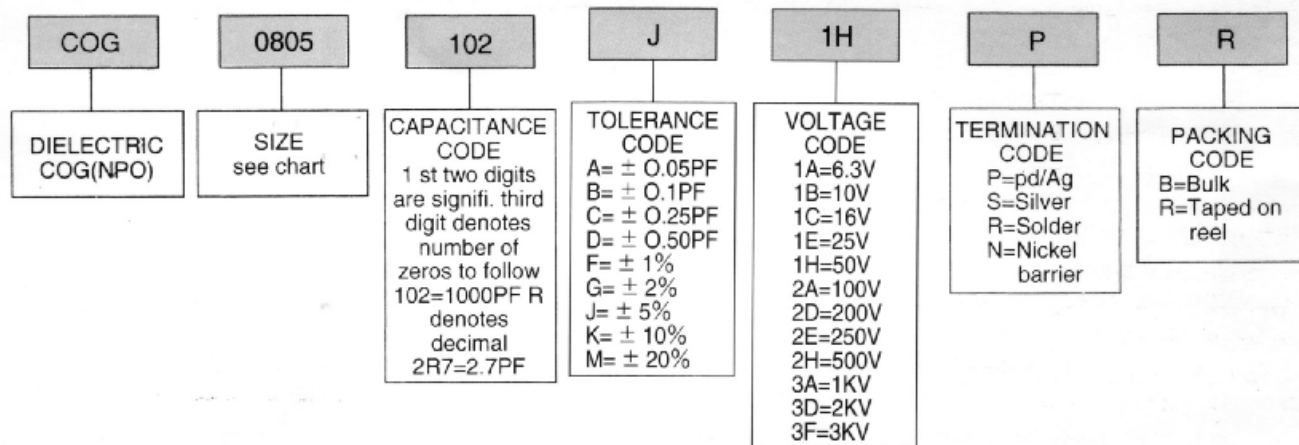

Part Code Designation

TYPE	RATED VOLT. (VDC)	CAPACITANCE		DIMENSIONS (MM)		
		RANGE (pF)	TOL	L	W	T max
0402	50	0.47 ~ 220	A.B.C.D.F.G. (UNDER 10pF)	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.55
0603		0.5 ~ 680		1.600 $\pm$ 0.10	0.80 $\pm$ 0.10	0.80
0805	50	0.5 ~ 2700	F.G.J.K. (OVER 10pF)	2.00 $\pm$ 0.15	1.25 $\pm$ 0.15	1.25
1206		0.5 ~ 6800		32.0 $\pm$ 0.20	16.0 $\pm$ 0.20	1.27
1210		4700 ~ 8200	J.K.	32.0 $\pm$ 0.20	25.0 $\pm$ 0.20	1.65
1812		10000 ~ 15000	J.K.	4.50 $\pm$ 0.20	3.20 $\pm$ 0.20	1.65

NOTES

- Dimensions are in millimeters.
- Other capacitance values and voltages are available upon request.