


50CF 5.2 ϕ ×20

高分断能力瓷保险丝管(速断型)


HIGH BREAKING CAPACITY CERAMIC TUBE FUSE (QUICK-ACTING)

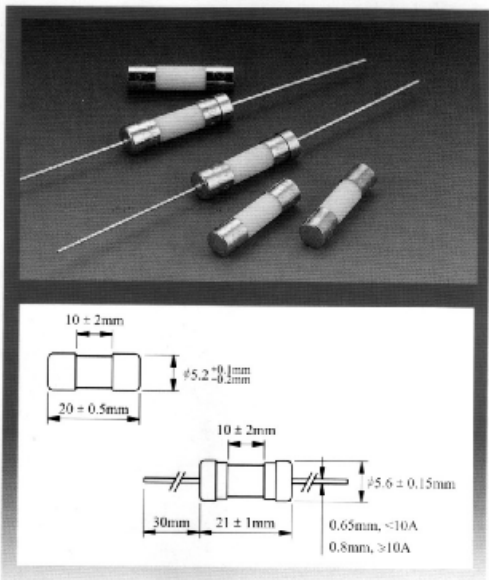

目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS				I ² T 参考值 REFERENCE (A ² S)
			CCC	SEMKO	VDE	UR	
0250H	250mA	2800					0.031
0315H	315mA	2500					0.049
0400H	400mA	2000					0.062
0500H	500mA	1800					0.15
0630H	630mA	1500					0.25
0800H	800mA	1200					0.60
010H	1A	1000					0.95
013H	1.25A	800					1.6
016H	1.6A	600					2.7
020H	2A	500					4.2
025H	2.5A	400					7.8
032H	3.15A	350					12
040H	4A	300					20
050H	5A	250					32
063H	6.3A	200					1
080H	8A	200					67
100H	10A	200					121
120H	12A	200					143
150H	15A	200					325

H DENOTES FOR 250V (H表示250V)

I-T CHARACTERISTICS CURVE
电流-时间曲线图

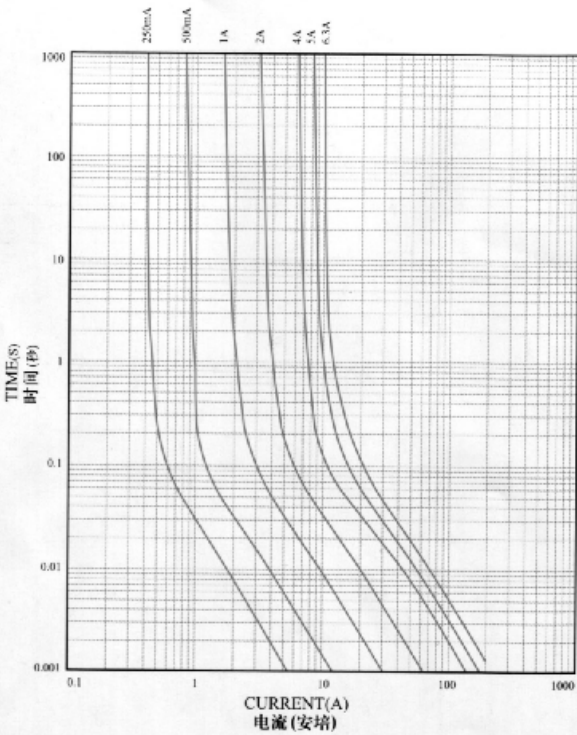

分断电流:

BREAKING CAPACITY:

1,500 amperes at 250V AC (250mA-6.3A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max(最慢)	30min
2.75In	Min(最快)	10ms
	Max(最慢)	2sec, 3sec(4A, 5A, 6.3A)
4In	Min(最快)	3ms
	Max(最慢)	300ms
10In	Max(最慢)	20ms