



20N 2.4 ϕ ×7

超小型保险丝管(特快熔断型) MICROFUSE (VERY FAST-ACTING)

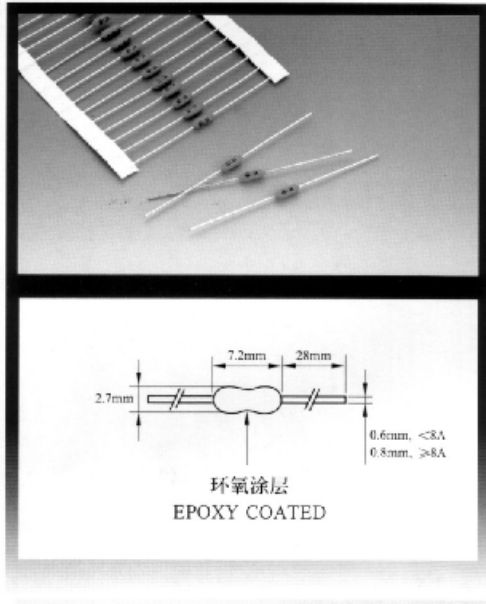

I-T CHARACTERISTICS CURVE
电流-时间曲线图

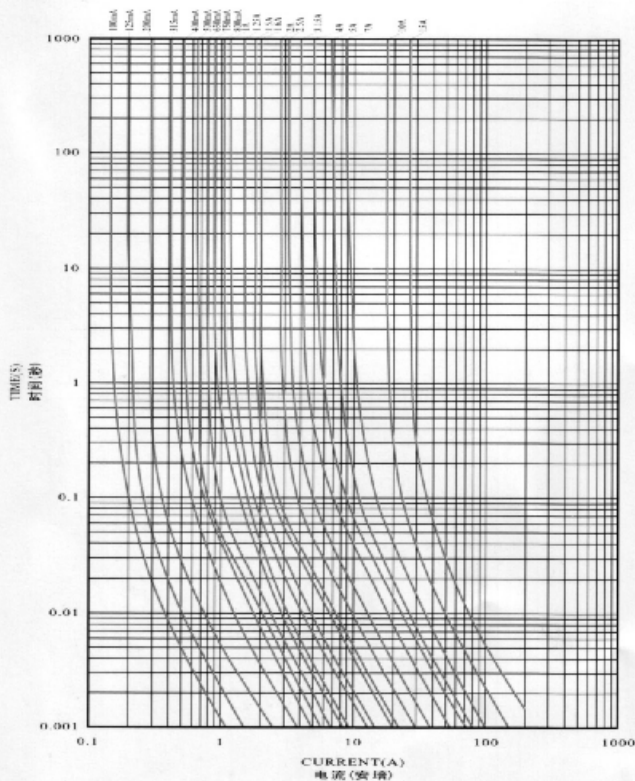

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² .S)
		CCC	UL		UR		CSA		PSE	
		H	H	L	H	L	H	L	L	
0100H/L	100mA			●	●		●	●		0.0013
0125H/L	125mA			●	●		●	●		0.0018
0160H/L	160mA			●	●		●	●		0.0029
0200H/L	200mA	○		●	●		●	●		0.0058
0250H/L	250mA	○		●	●		●	●		0.010
0300H/L	300mA			●	●		●	●		0.014
0315H/L	315mA	○		●	●		●	●		0.018
0375H/L	375mA		●	●			●	●		0.025
0400H/L	400mA	○		●	●		●	●		0.032
0500H/L	500mA	○	●	●			●	●		0.045
0600H/L	600mA		●	●			●	●		0.049
0630H/L	630mA	○	●	●			●	●		0.054
0700H/L	700mA		●	●			●	●		0.067
0750H/L	750mA		●	●			●	●		0.077
0800H/L	800mA	○	●	●			●	●		0.095
010H/L	1A	○	●	●			●	●	●	0.16
012H/L	1.2A		●	●			●	●	●	0.23
013H/L	1.25A	○	●	●			●	●	●	0.29
015H/L	1.5A		●	●			●	●	●	0.45
016H/L	1.6A	○	●	●			●	●	●	0.54
020H/L	2A	○	●	●			●	●	●	1.1
023H/L	2.25A		●	●			●	●	●	1.4
025H/L	2.5A	○	●	●			●	●	●	1.8
030H/L	3A		●	●			●	●	●	2.7
032H/L	3.15A	○			●	●	●	●	●	3.2
035H/L	3.5A				●	●	●	●	●	4.2
040H/L	4A	○			●	●	●	●	●	5.0
050H/L	5A	○			●	●	●	●	●	7.2
060H/L	6A				●	●	●	●	●	7.7
063H/L	6.3A				●	●	●	●	●	7.9
070H/L	7A				●	●	●	●	●	9.4
080H/L	8A				●	●	●	●	●	13.4
090H/L	9A				●	●	●	●	●	16.9
100H/L	10A				●	●	●	●	●	24.2
120L	12A					●	●	●	●	35.6
150L	15A						●	●	●	56.8
200L	20A						●	●	●	115

H DENOTES FOR 250V (H表示250V)

L DENOTES FOR 125V (L表示125V, 100mA-10A)

L DENOTES FOR 72V (L表示72V, 12A-15A)

L DENOTES FOR 60V (L表示60V, 20A)

● DENOTES FOR APPROVED (●表示已取得认证)

○ DENOTES FOR PENDING (○表示申请中)

分断电流:

INTERRUPTING RATING:

50 amperes at 125V AC (100mA-3A)

50 amperes at 250V AC (375mA-3A)

30 amperes at 125V AC (3.15A-10A)

30 amperes at 250V AC (100mA-350mA, 3.15A-10A)

30 amperes at 72V AC (12A-15A)

50 amperes at 60V DC (20A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快4小时)
200%	20 sec Max (最慢20秒)