

HOLLY®

好利®


RoHS & Pb-free



好利来有限公司
厦门宁利电子有限公司

61T 6.35^Φ×32

玻璃保险丝管(慢断型) GLASS TUBE FUSE (TIME-LAG)

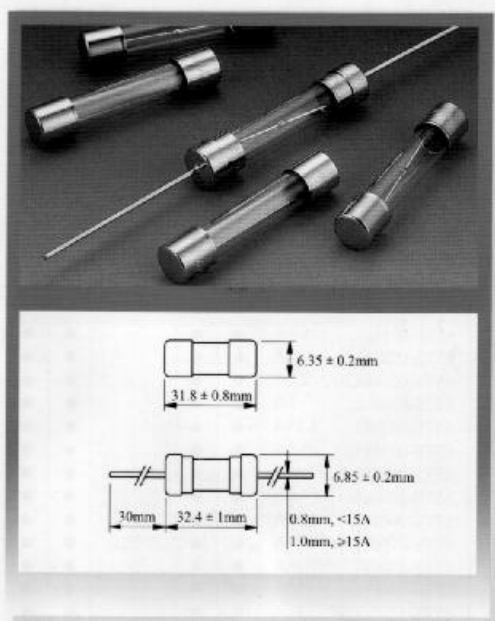


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS	I ² T 参考值 REFERENCE (A ² S) (RoHS)
61T-080H	8A	100	●	570.4
61T-100H	10A		●	874.6
61T-120H	12A			1369
61T-125H	12.5A		●	1428
61T-130H	13A			1484
61T-150H	15A			2205
61T-160H	16A		■	2830
61T-170H	17A			
61T-180H	18A			
61T-200H	20A			3715
61T-250H	25A			
61T-300H	30A			
61T-400H	40A			

H DENOTES FOR 250V (H 表示250V)

● DENOTES FOR APPROVED (● 表示已取得认证)

61T RoHS I-T CHARACTERISTICS CURVE
61T RoHS 电流-时间曲线图

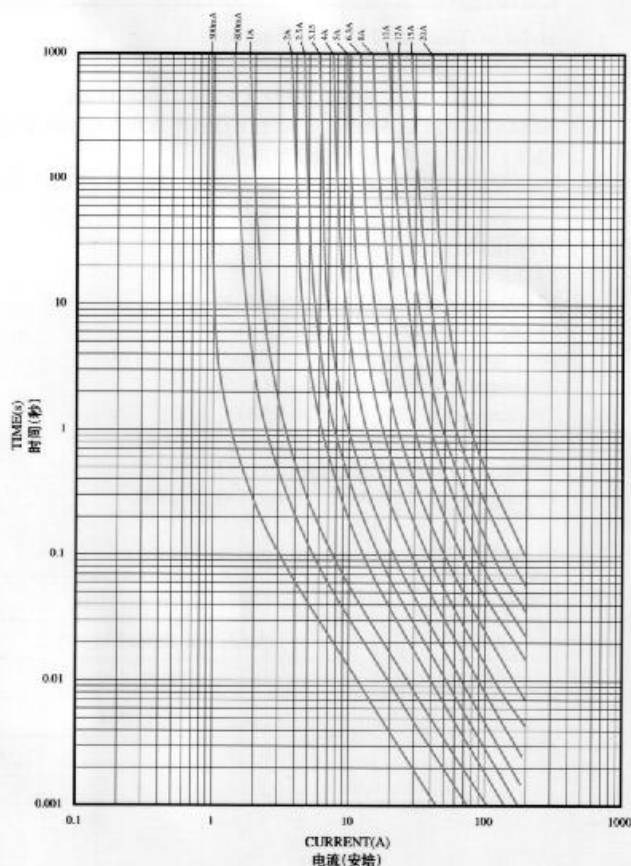

分断电流:

BREAKING CAPACITY:

100 amperes at 250V AC (8A-40A)

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max(最慢)	30min
	Min(最快)	200ms
2.75In	Max(最慢)	10sec
	Min(最快)	40ms
4In	Max(最慢)	3sec
	Min(最快)	10ms
10In	Max(最慢)	300ms
	Min(最快)	