**Feature -**

Small dimension, Max 8 positions

Applications -


High value toy, power strip voltage selector

Selection key on the application


AV machine, video recorder, air cleaner

► SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	1P8T
CONTACT RATING	30 V DC , 0.5 A
CONTACT RESISTANCE	25 mΩ max . 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ min . 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	1P8T - 300 ± 150 gf . cm
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C

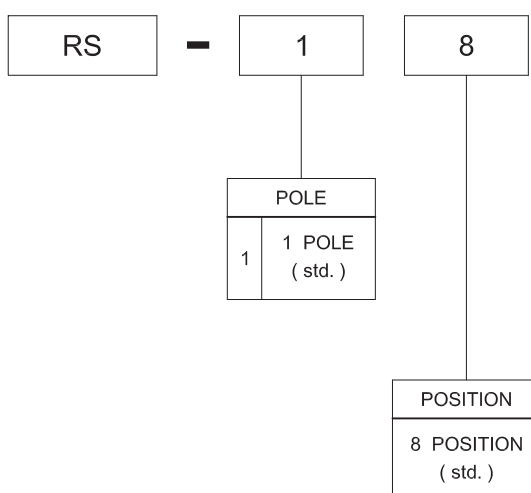
► HOW TO ORDER

► DIMENSION

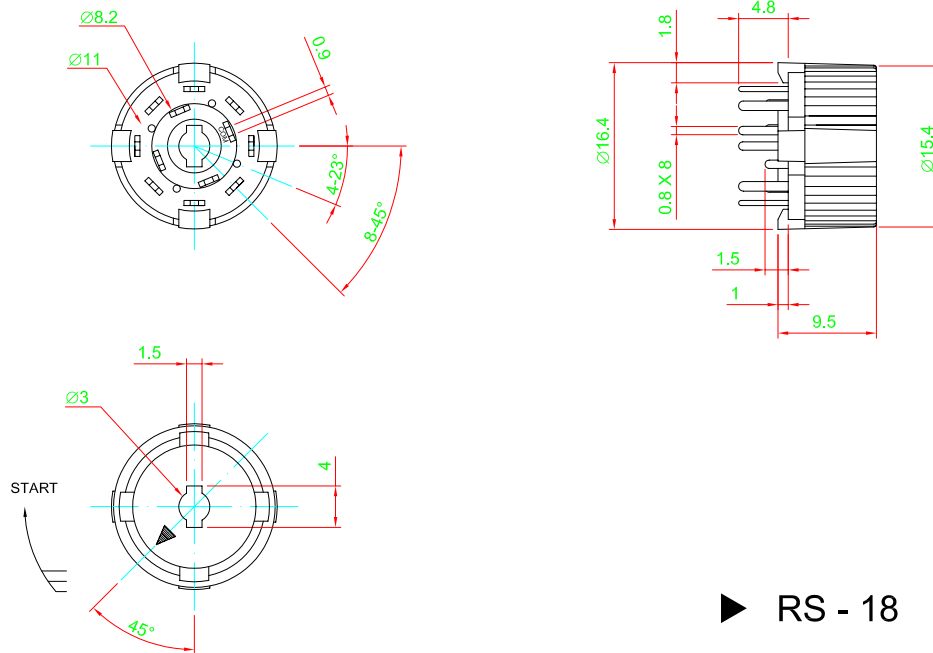


► RS - 18

► SCHEMATIC



► P.C.B. LAYOUT

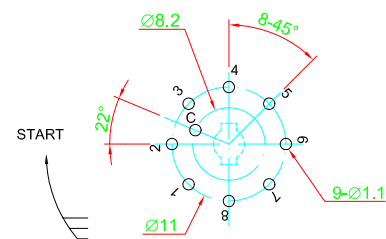

► UNIT WEIGHT

■ RS - 1.8 ± 0.05 g / pcs

► MATERIAL

- FRAME - PC
- BASE FRAME - PA + GF
- TERMINAL - BRASS SILVER PLATING