

DS,DA,DP,DSPV Series Dip Switches



SPECIFICATION:

1. Non-switching rating : 100mA 50VDC
2. Switching rating : 25mA 24VDC
3. Contact Resistance : 50mΩ max.
4. Insulation Resistance : 100MΩ min.
5. Dielectric strength : 500VAC/1minute
6. Electrical life : 2000 operations
7. Operation force : 400 gf~1000gf
8. Stroke : 2.0mm
9. Material : P.B.T. UL94V-0
10. Contact : phosphor bronze with gold plated



HOW TO ORDER

MODEL NO.	+	ACTUATOR	+	POSITION	+	COVER COLOR	+	MARKING	+	SEAL
DS : Slide type		□ : Raised type (standard)		02 : 2 positions		R : Red		N : No marking		□ : Regular
DA : Right angle type		R : Recessed type		12 : 12 positions		BU : Blue				T : Top tape sealed
DP : Piano type		L : Long key (only for DP & DSPV series)				K : Black				
DSPV : Tiny piano										



DS(R) SERIES

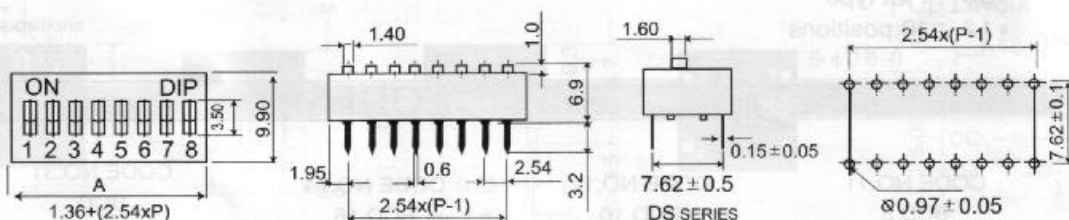



DA SERIES

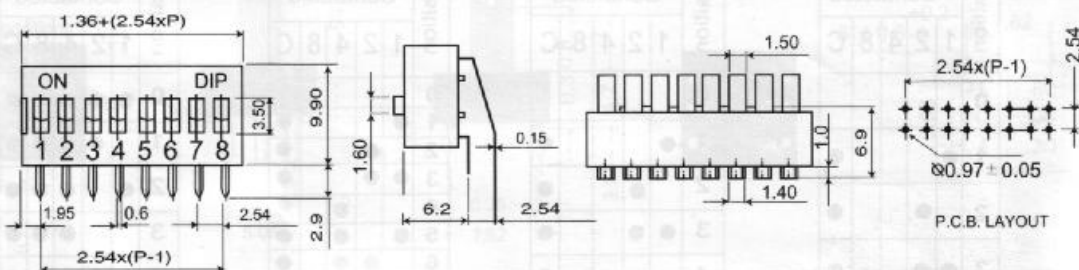

DP(L) SERIES

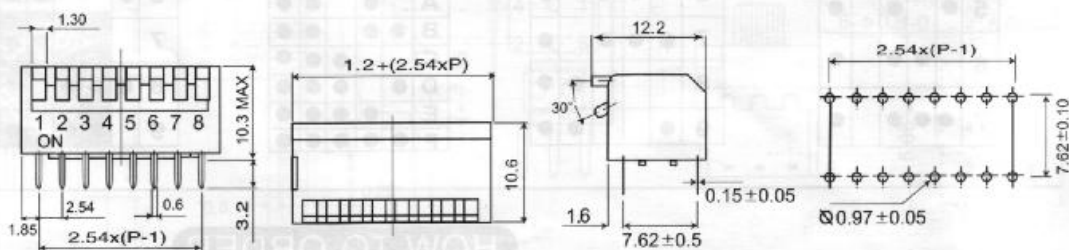

DSPV SERIES

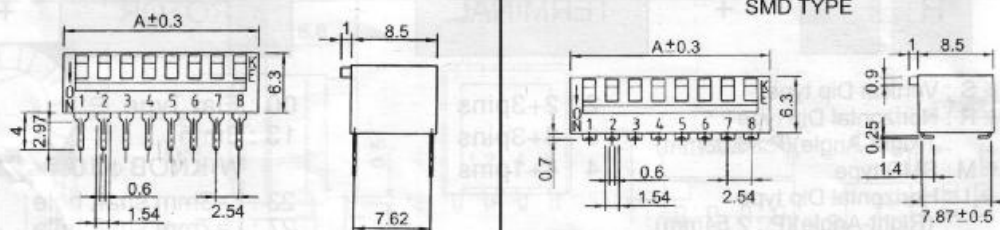

Positions NO.		2	3	4	5	6	7	8	9	10	12
A	mm	6.08	8.72	11.90	14.44	16.98	19.52	22.06	24.60	27.14	32.22