


■ SPECIFICATION:


Rating : DC 12V 50mA	Mechanical Life : 1,000,000 cycles
Insulation Resistance : > 100M Ω DC250V	Electrical Life : 100,000 cycles
Withstand Voltage : AC250V 1minute	Ambient Temper. Used : -25°C to +70°C
Contact Resistance : < 100m Ω	Ambient Humidity Used : < 85% RH
Soldering Temper : < 255°C max, 5sec	Operating Force : 130, 160 $\pm$ 30g or 250 $\pm$ 50g

06,07 Series Tact Switches




0670G, 0680G, 0695G, (Grounding)
06125G, 06135G




MODEL NO.	H
0670G	7.0
0680G	8.0
0695G	9.5
06125G	12.5
06135G	13.5

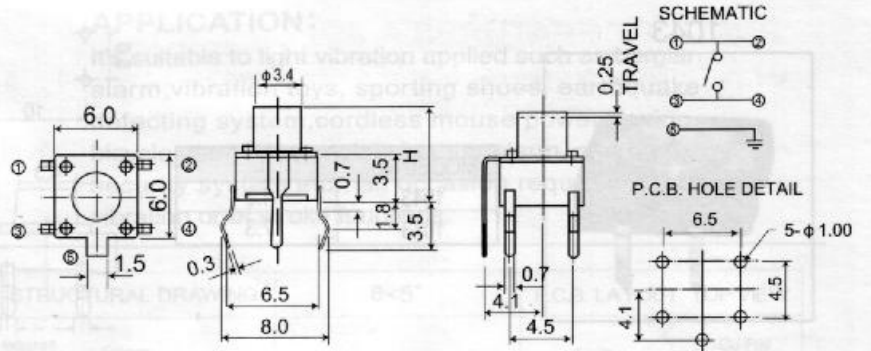


0673G (Grounding)

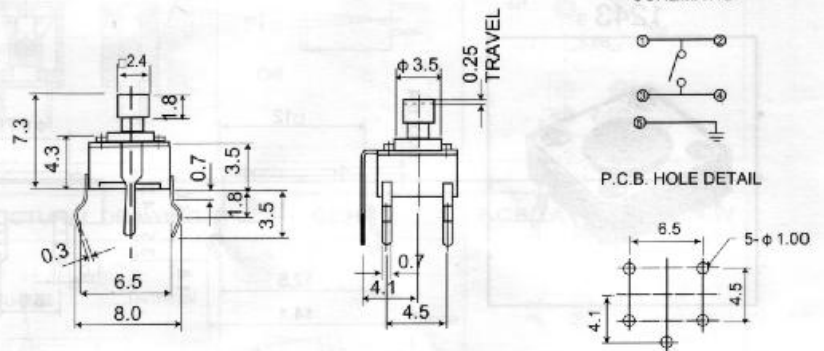

0743, 0750




MODEL NO.	H
0743	3.15
0750	3.85

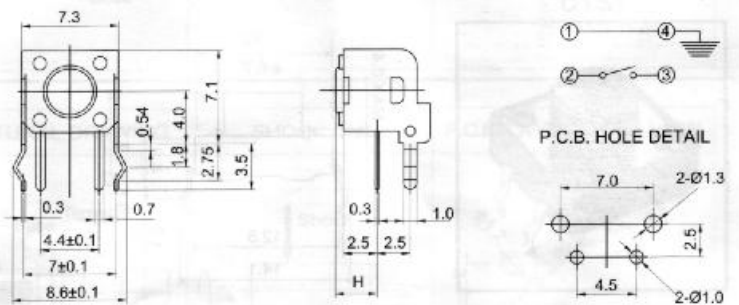

0770, 0795, 0780



MODEL NO.	H
0770	5.85
0795	8.35
0780	6.85

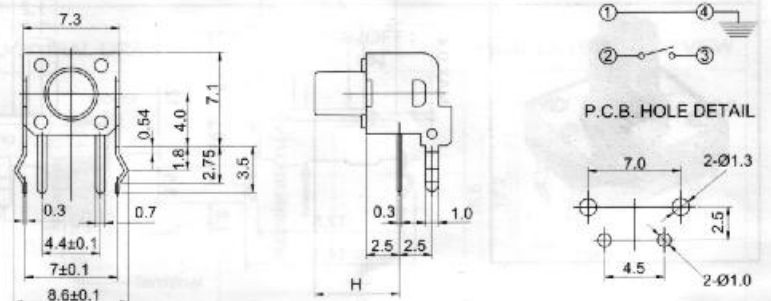

SPECIAL: 07125, H=11.35
07135, H=12.35