


Rating : DC30V 0.1A
 Insulation Resistance : >100M $\frac{1}{2}$ DC250V
 Withstand Voltage : AC250V 1 minute
 Contact Resistance : $\leq 50 \text{ m}\Omega$
 Soldering Temperature : 245 $\pm$ 5 $^{\circ}$ C max. 3sec

Mechanical Life : 30,000 cycles
 Electrical Life : 10,000 cycles
 Ambient Temper. Used : - 20 $^{\circ}$ C to + 70 $^{\circ}$ C
 Ambient Humidity Used : < 85% RH
 Operating force : 100 to 400gf

DPDT




PS909L-22 LOCK
PS909NN-22 NON-LOCK

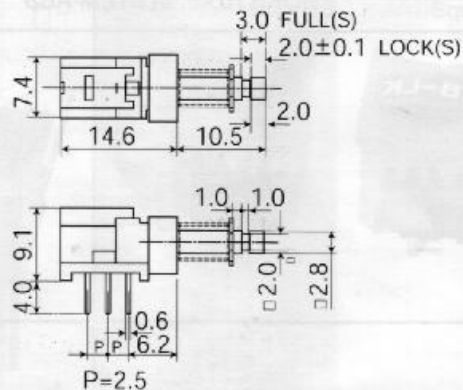


SCHEMATIC




P.C.B. HOLE DETAIL




2P4T



PS909L-42 LOCK
PS909NN-42 NON-LOCK

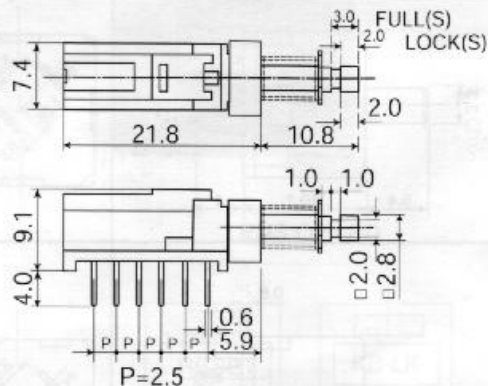

SCHEMATIC



P.C.B. HOLE DETAIL

