


SS Series Slide Switches

SPECIFICATION:

Rating	: DC 30V, 0.3A
Contact Resistance	: 30m ohm max. at 1A DC
Insulation Resistance	: 100M ohm at 500V DC
Withstand Voltage	: AC 500V for 1 minute
Switching Life	: 10,000 Cycles (unloading/15-18 Cycles per minute)

2P2T







SS22F25G__ (T__ or M__)

Optional knob size (L)

G : 4-18mm

T : 4-18mm

M : 7-16mm

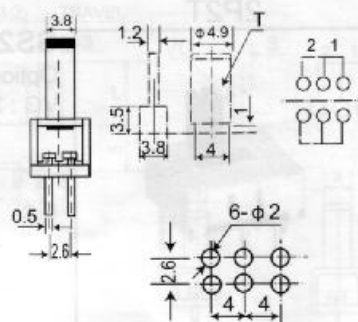

HOLE LAYOUT ± 0.05