



P10 Series Push Switches (Multiple Keys)

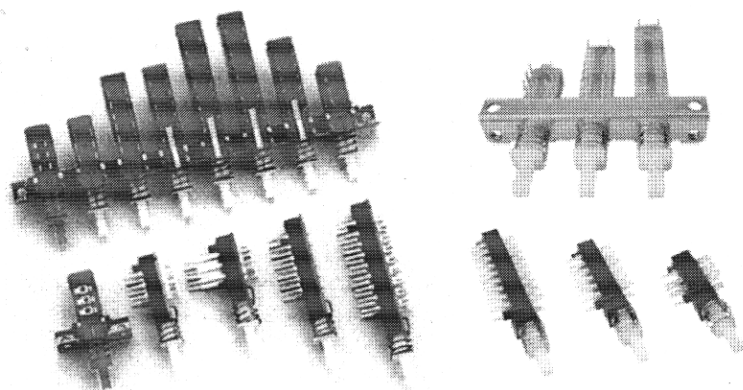

SPECIFICATION

RATING	: 0.5A 30V DC.
CONTACT RESISTANCE	: 30mΩ Max.
INSULATION RESISTANCE	: 100MΩ at 500V DC.
WITHSTAND VOLTAGE	: 500V AC for 1 minute.
OPERATING FORCE	: A-300±100g. B-200±100g.
LIFE	: 10,000 Cycles.

TERMINAL STYLE							
PART NO.	A	B	C	D	E	F	G
SPECIFICATION							
	H=	9	13	16	14	18	21
SCHEMATIC							
	COM.						

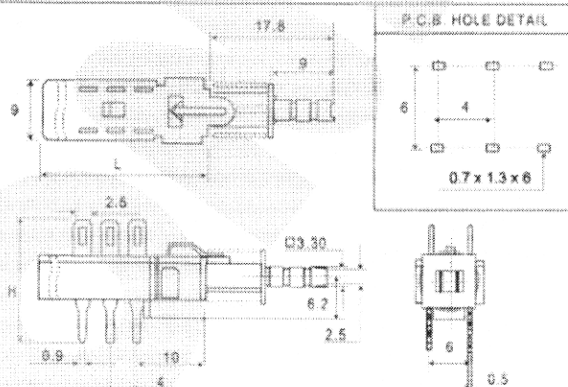

Circuit Poles	2	4	6	8	10
L=	24.5	36.5	48.5	60.5	72.5

P10 -



No. of Pole
1: 2Pole
2: 4Pole
3: 6Pole
4: 8Pole

Terminal
A: Lock N: Non Lock
B: With Bracket N: W/O Bracket

NO. of keys
□: Non Cap
L: Self.Lock
T: Inter.Lock

□: Non Bracket M: M3 x P0.5 O: φ3.2

Class of Push Button (Cap)			
A		B	
D		C	

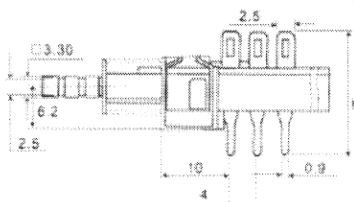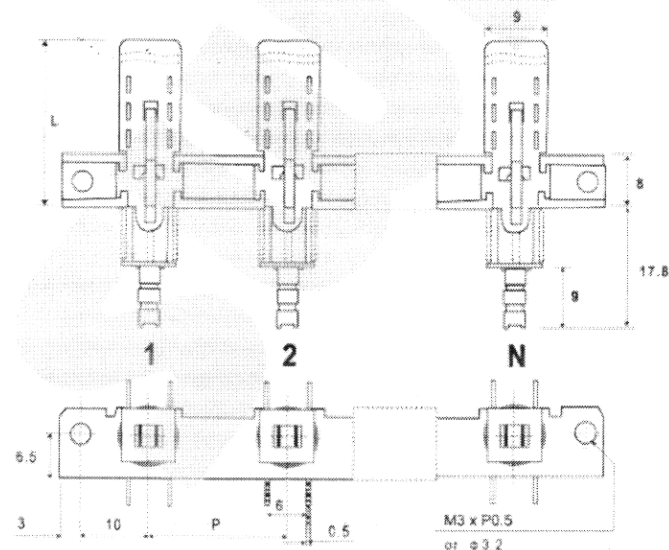

TYPE	P(Pitch)
A	10
B	12.5
C	15
D	17.5
E	20