


SMD

NEW



IT-1181

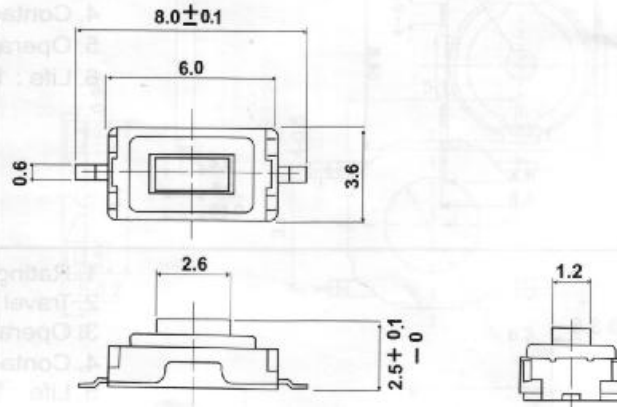

1. Rating : DC12V 50mA
2. Travel : 0.25 ± 0.1 mm
3. Operating Force : 160 ± 30 g
 250 ± 50 g
4. Contact Resistance : $100\text{m } \Omega$ Max.
5. Life : 100,000 Cycles Min.