

PUSH BUTTON SWITCH

Features

- The power switch conforms to safety standards for electrical equipment.
- A superior space factor by reducing the depth dimension.
- The snap-in type for easy mounting.
- The color can be changed to correspond to the set design.

Specifications

Item	Standard
Rating	3A 125VAC
Contact Resistance	50mΩ max. (Initial)
Insulation Resistance	100MΩ min. (at 500V DC)
Dielectric Strength	1000VAC, 60/50Hz for 1 minute.
Service Life	Mechanically: 100,000 operations min. Electrically: 50,000 operations min.

Product selection

PB ☐ ☐ ☐

1 2 3

1. ACTUATOR TYPES

- 301 ig Round
- 302 Big Sexangle
- 303 quare
- 304 Small Sexangle
- 305 ound
- 308 Rectangle

2. FUCTION

- A: ON-OFF
- B: OFF-(ON)
- C: ON -(OFF)
- ()=MOMENTARY

3.BUTTON COLORS

- R: Red
- O: Orange
- Y: Yellow
- G: Green
- BL: Blue
- B: Black
- W: White

Dimensions

unit : mm

Item NO.

Dimensions


PB-301



PB-301A ON-OFF

PB-301B OFF-(ON)

PB-301C ON-(OFF)

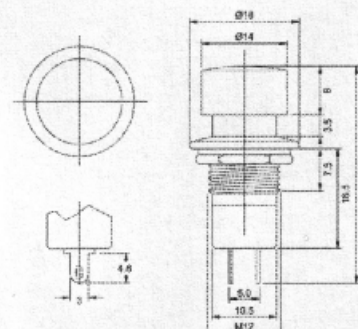


PB-302



PB-302A ON-OFF

PB-302B OFF-(ON)

PB-302C ON-(OFF)

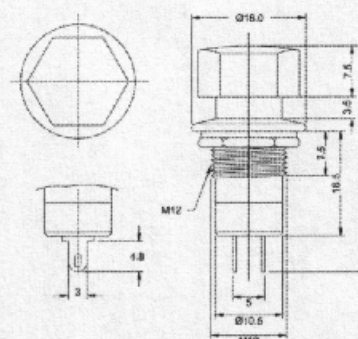

PUSH BUTTON SWITCH


Dimensions

unit : mm


Item NO.

Dimensions

PB-303




PB-303A ON-OFF
PB-303B OFF-(ON)
PB-303C ON-(OFF)

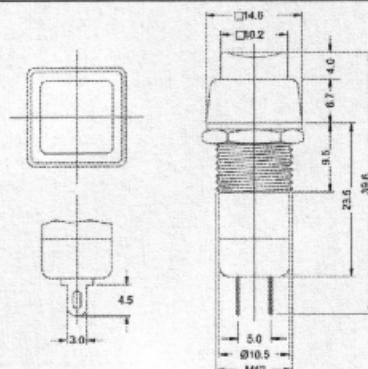


PB-304




PB-304A ON-OFF
PB-304B OFF-(ON)
PB-304C ON-(OFF)

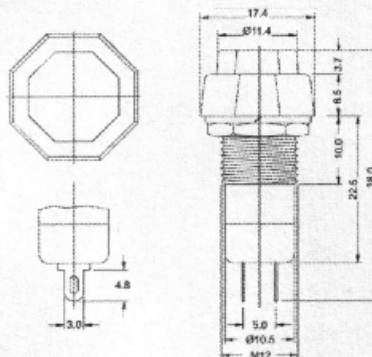


PB-305



PB-305A ON-OFF
PB-305B OFF-(ON)
PB-305C ON-(OFF)

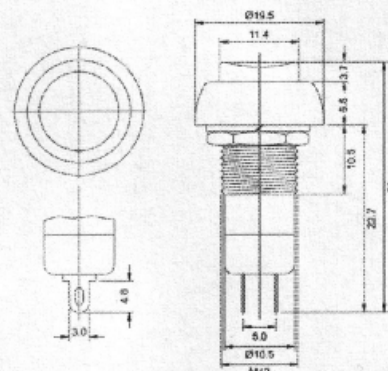

PB-308



PB-308A ON-OFF
PB-308B OFF-(ON)
PB-308C ON-(OFF)

