

T1000 SEAL CAP

CONTACT RATING : 5A with resistive load @ 120 VAC or 28 VDC
or 0.4VA

ELECTRICAL LIFE : 50,000 Make-and-break cycles at full load
CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC
100 mA for both coin silver and gold plated contacts.
INSULATION RESISTANCE : 1,000 MΩ min
DIELECTRIC STRENGTH : 1,000V RMS @ sea level.
OPERATING TEMPERATURE : -30°C to +130°C

Case-diallyl phthalate (DAP)

TOGGLE HANDLE-Brass, chrome nickel plated


BUSHING-Brass, nickel plated

HOUSING-Stainless Steel.

END CONTACT-Coin silver, silver plated, or gold plated.

END TERMINAL-Brass, silver plated, or gold plated.



CENTER CONTACT & TERMINAL-Brass, silver plated, or gold plated.



T1011BSTQ

Model No.	TYPE		
			
1010	ON		OFF
1011	ON		ON
1012	ON		(ON)
1013	ON	OFF	ON
1014	(ON)	OFF	(ON)
1015	ON	OFF	(ON)
Term. Conn	2 - 3	OPEN	2 - 1




Schematic

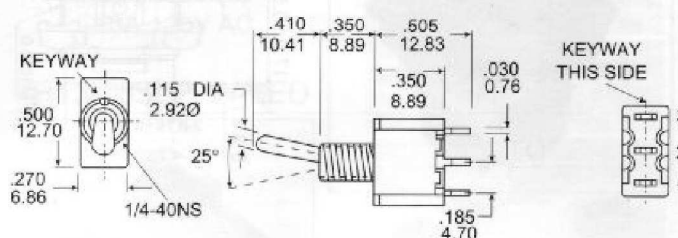

T1021BSTQ

Model No.	TYPE		
1020	ON		OFF
1021	ON		ON
1022	ON		(ON)
1023	ON	OFF	ON
1024	(ON)	OFF	(ON)
1025	ON	OFF	(ON)
1026	ON	ON	ON
Term. Comm.	2-3,5-6	OPEN	2-1,5-4

Schematic

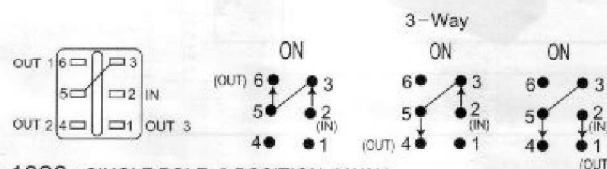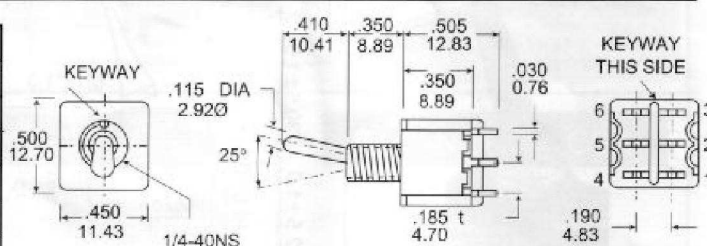


1026 : SINGLE POLE, 3 POSITION, 3 WAY



T1031BSTQ

Model No.	TYPE		
1030	ON		OFF
1031	ON		ON
1032	ON		(ON)
1033	ON	OFF	ON
1034	(ON)	OFF	(ON)
1035	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8 9	OPEN	2-1,5-4 8 7

Schematic

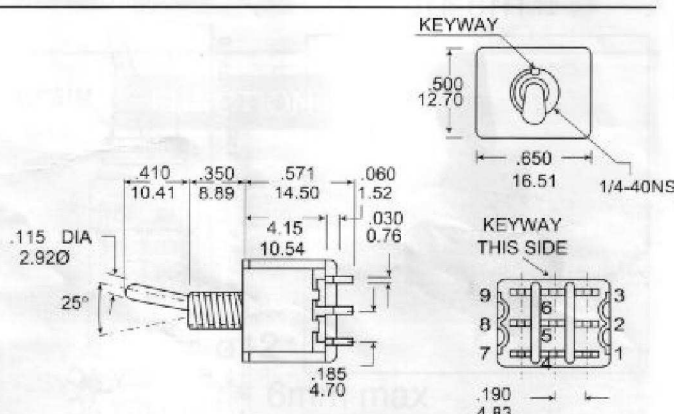

T Series Toggle Switches



4PDT




T1041BSTQ

Model No.	TYPE		
1041	ON		ON
1042	ON		(ON)
1043	ON	OFF	ON
1044	(ON)	OFF	(ON)
1045	ON	OFF	(ON)
1046	ON	ON	ON
Term. Comm.	2-3 5-6 8-9 11-12	OPEN	2-1 5-4 8-7 11-10


Schematic

2 Comm. 5 Comm. 8 Comm. 11 Comm.
1 3 4 6 7 9 10 12

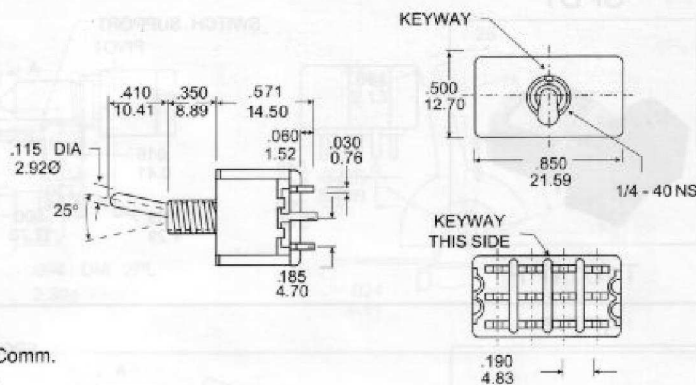


TERMINAL OPTIONS


SPDT




T1011PTNQ

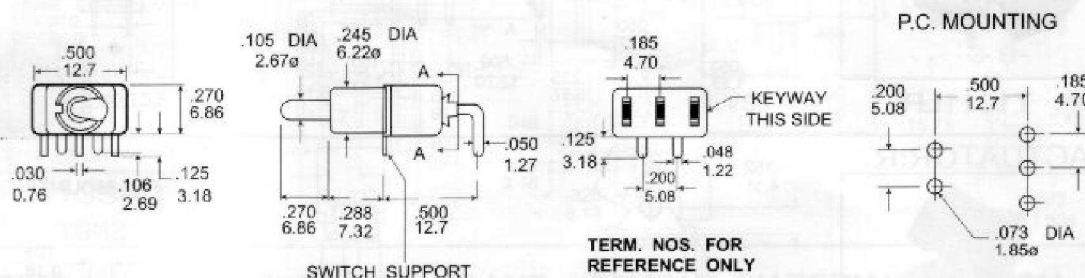


SPDT




T1011LTNQ

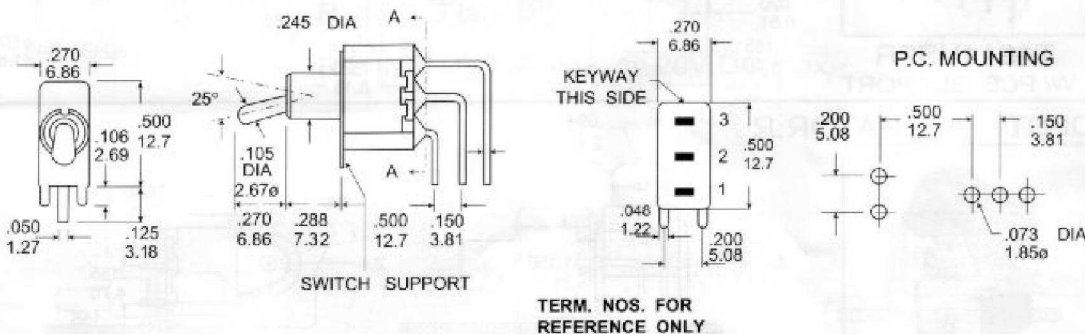

DPDT




T1021PTNQ

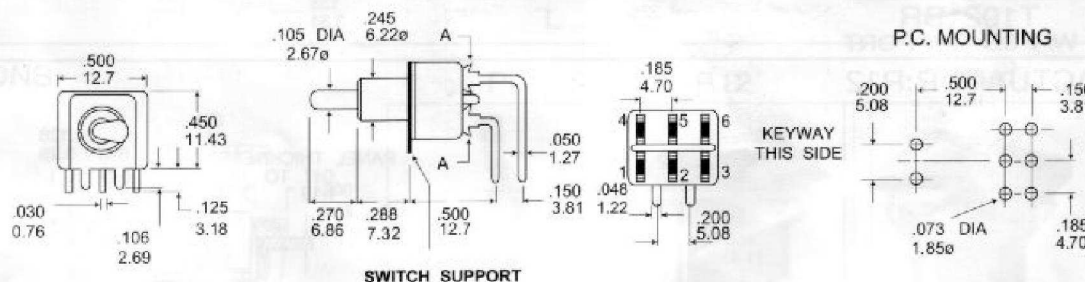

DPDT




T1021LTNQ

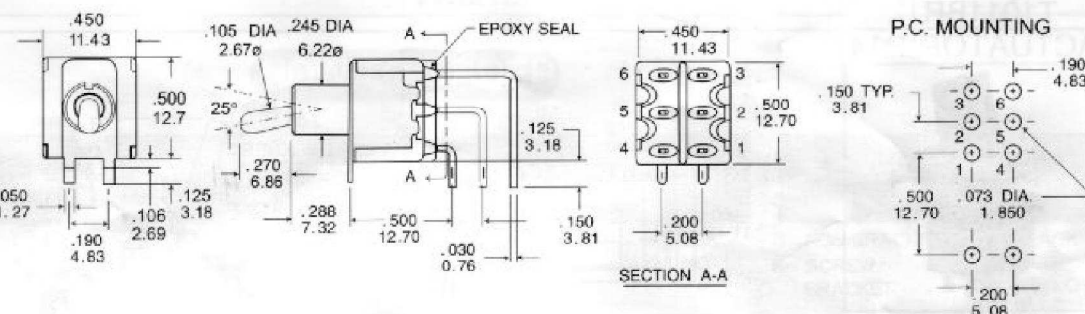


T Rocker Paddle Switches




SPDT




T1011PR

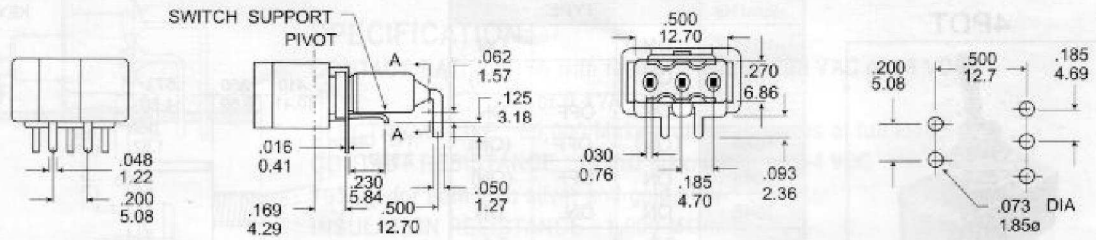


SPDT




T1011LR

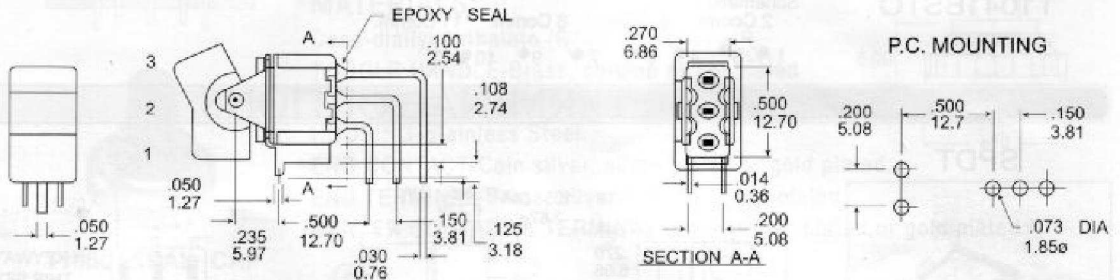


ACTUATOR:R




T1011VS2R
W/ PCB SUPPORT

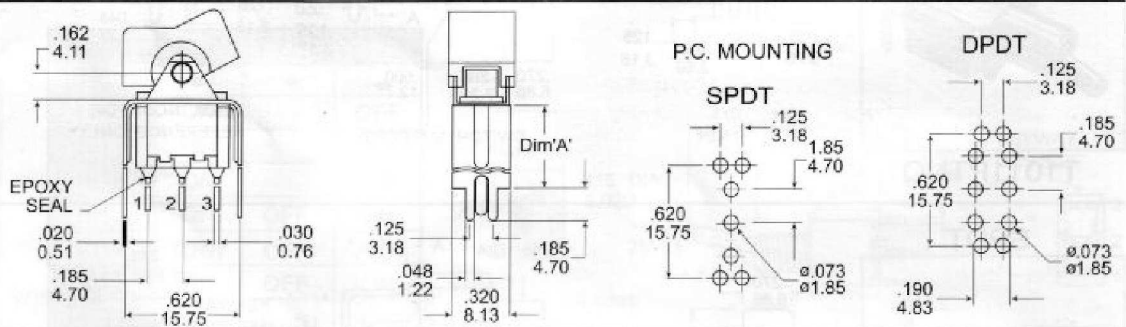

DPDT ACTUATOR:R




T1021BR
W/ PCB SUPPORT

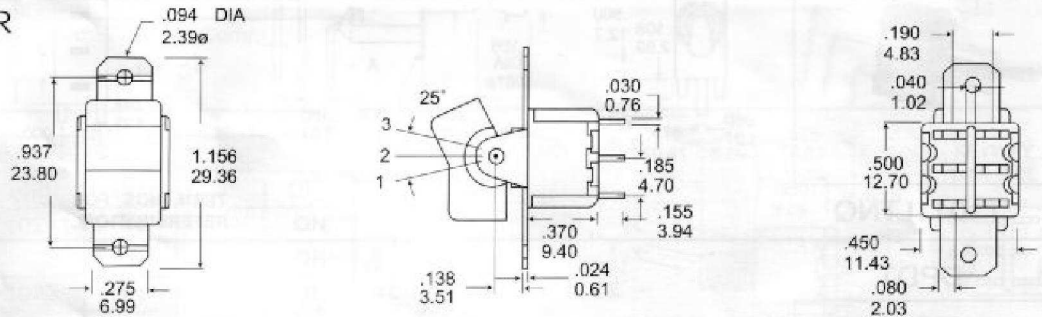

ACTUATOR:R12




T1011BR12

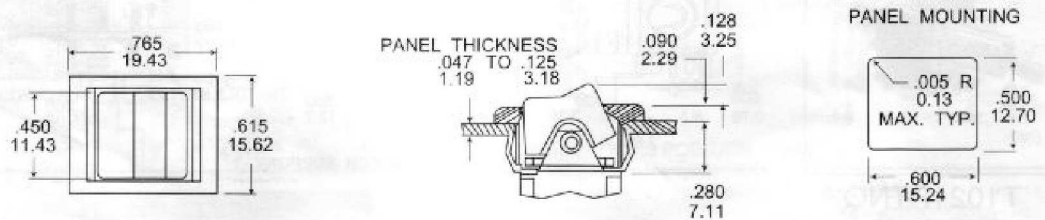

ACTUATOR:P14



T1021BP14

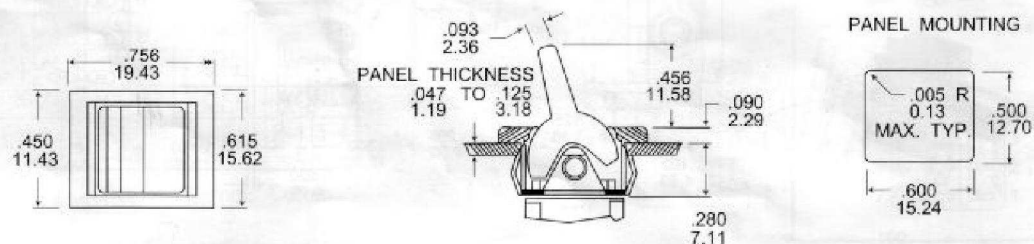

T Toggle, Rocker Paddle Switches





ACTUATOR: P13



T1011BP13

W/ SCREW BRACKET

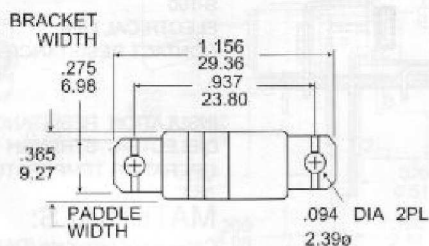

SPDT



SPDT



T1011VS2TNQ


T1011CSNQ

W/O PCB SUPPORT



OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00

P.C. MOUNTING




TERMINAL OPTIONS

CONTACT AND TERMINAL MATERIALS OPTION:


Q : Silver Plated. (Standard)

R : Gold Plated.


RATING : 0.4VA max. @ 20V DC max.



B




C




THK .030 (0.76)


C



P



L



VS2

ACTUATOR OPTIONS

P



R12

P14


S
(STANDARD)

T

P
(FLATTED)



T1021BPTQ



HOW TO ORDER

T +	MODEL NO.	TERMINAL TYPE	ACTUATOR	BUSHING	CONTACT & TERMINAL MATERIAL	EPOXY SEAL	BRACKET	ACTUATOR COLOR
		B L C VS2 P	S R12 T P13 P P14 R	T : THREAD N : NON-THREAD	Q : SILVER R : GOLD	Y : YES N : NO	□ : NON-BRACKET K : SCREW BRACKET	B : BLACK R : RED Y : YELLOW BU : BLUE