


R4 series



2 : 10A 250V, 15A 125V AC

5 : 15A 250V, 20A 125V AC

MODEL NO.	TYPE
R41□	SPST ON OFF
R42□	SPDT ON ON
R43□	SPDT ON OFF ON
R44□	SPDT ON (ON)
R45□	SPST OFF (ON)
R46□	SPDT (ON) OFF (ON)
R47□	SPST ON (OFF)
R48□	SPDT ON OFF (ON)
R49□	SPST Illuminated

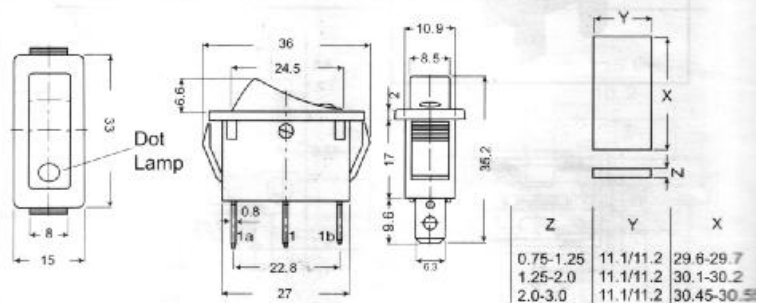

SPECIFICATION:

- * Contact Rating : 10A 250V & 16A 125V AC, 15A 250V AC
- * Mechanical Life : 50,000 Cycles (Min)
- * Electrical Life : 20,000 Cycles (Min)
- * Contact Resistance : 50mΩ
- * Insulation Resistance : DC 500V 100MΩ
- * Dielectric Strengths : AC1500V 1 Min

MATERIALS:

- * Body : Nylon 66
- * Rocker : PC or Nylon.
- * Contact Surface : Alloy Contact Point, Silver Plated
- * Illuminated : Lamp.
- * Terminal : Brass, Silver Plated.

HOW TO ORDER

