


ROCKER SWITCHES

Features

- Power switch conforms to safety standards for electrical equipment.
- Compact with a good space factor.
- Snap-in type for easy mounting.
- The color can be changed to correspond to the set design.

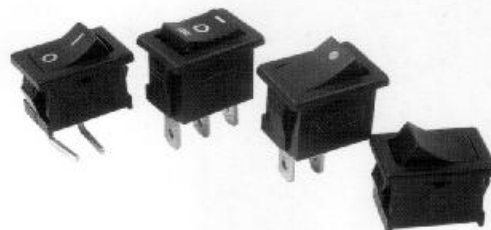

Applications

- Information and office equipment such as personal computers, word processors, facsimiles, monitors, etc.

Specifications

ITEM	STANDARD
Rating	10A 125VAC / 6A 250VAC, 4A 125VAC / 2A 250VAC
Insulation Resistance	100M Ω min (DC 500V)
Dielectric Strength	AC 1500V (50/60Hz for 1 minute)
Contact Resistance	50m Ω max. (initial)
Electrically Life	10,000 cycles
Operating Force	400 $\pm$ 200 gf

Product Selection

R9	—		
SERIES	FUNCTION	ACTUATOR MARKING OPTION	
CODE	FUNCTION	CODE	MARKING
2 A	ON OFF	N	NONE
3 B	ON ON	P	— O
2 C	ON OFF ON	Q	I O
3 D	(ON — OFF)	R	●
3 E	(ON) — ON	S	I O II
3 F	(ON)—OFF—(ON)	T	ON OFF
2 AL	ON OFF (With LED)		
32ALP	ON OFF (With Lamp)		

PANEL HOLE SIZE		
PANEL THICKNESS	DIM. X	DIM. Y
0.75 ~ 1.25	19.2	13.0
1.25 ~ 2.0	19.4	13.0
2.0 ~ 3.0	19.6	13.0

Terminal Type


TERMINAL TYPE					
CODE	TERMINAL	CODE	TERMINAL	CODE	TERMINAL
2 Quick Connector		3 Soldering		4 PCB	

ROCKER SWITCHES

Dimensions

Unit: mm

R9-22A




SWITCHING FUNCTION	
	OFF
	ON



Panel hole size




R9-33B






SWITCHING FUNCTION	
	ON
	ON



Panel hole size




R9-24A




SWITCHING FUNCTION	
	OFF
	ON



Panel hole size



R9-32F



SWITCHING FUNCTION		
	(ON)	NONE
	(ON)	



Panel hole size

