

ROTARY SWITCH

旋轉開關

SPECIFICATIONS


CONTACT RATING: 350 mA @ 110V (AC or DC)
150 mA @ 250V (AC or DC)
CURRENT CARRYING CAPACITY: 5 A continuous
ELECTRICAL LIFE: 15,000 cycles at full load up to 30,000
detent operations.
CONTACT RESISTANCE: 20 m Ω max. initial
DIELECTRIC STRENGTH: 1000 V RMS @ sea level
OPERATING TEMPERATURE: -20°C to 85°C
STOPS: Adjustable 2 through 12 position -30° indexing

MATERIALS


SHAFT—Glass filled nylon, color-gray
COVER—Glass filled nylon, color-gray
BASE—Glass filled nylon, color-red
CONTACTS—Brass, silver plated
TERMINALS—Brass, silver plated
HARDWARE—NUT—Zinc, nickel plated
LOCKWASHER—Steel, bright zinc plated
STOP RING—Brass, nickel plated

ITEM NO :


RS-1P







RS-2P




RS-3P



RS-4P

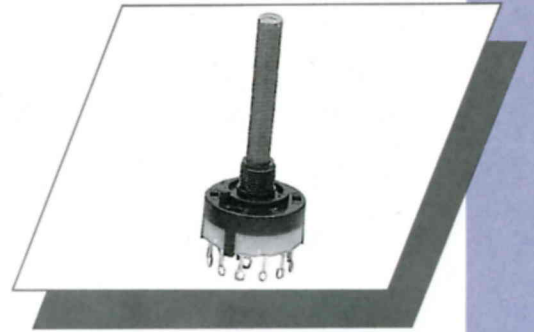


Panel Mounting




3/8 IN. BUSHING

TERMINAL:


(B) Solder Terminal



(P) P.C.B. Terminal




P.C. Mounting




ACTUATOR OPTIONS


S STD.



T




U



SPECIFICATIONS	
Rating	350 mA @ 110V(AC or DC) 150mA @ 250V(AC or DC)
Contact Resistance	20m Ω Max
Insulation Resistance	DC 500V - 100M Ω Min
Withstand Voltage	AC 500V - 1 Minute
Rotation Torque	1 $\pm$ 0.5 kg/cm
Electrical Life	15,000 cycles at full load up to 30,000 detent operations.

	Y	L
38F	30	38
18F	10	18
21F	13	21



海立電氣有限公司 HIGHLY ELECTRIC CO LTD				修正REVISION	日期DATE	說明DESCRIPTION	審核CHECKED	單位UNIT m/m	材質MATERIAL	日期DATE 83.10.01	料號 TYPE NO	RS-1P
							繪圖DRAWN HGG	比例SCALE 1=1	公差TOLERANCE ±0.15	加工PROCESS	檔名 FILE NO	RS-1P