

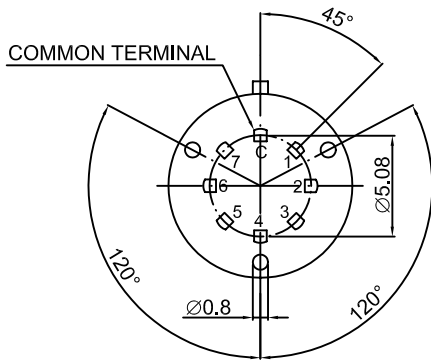


MR SERIES ROTARY SWITCH

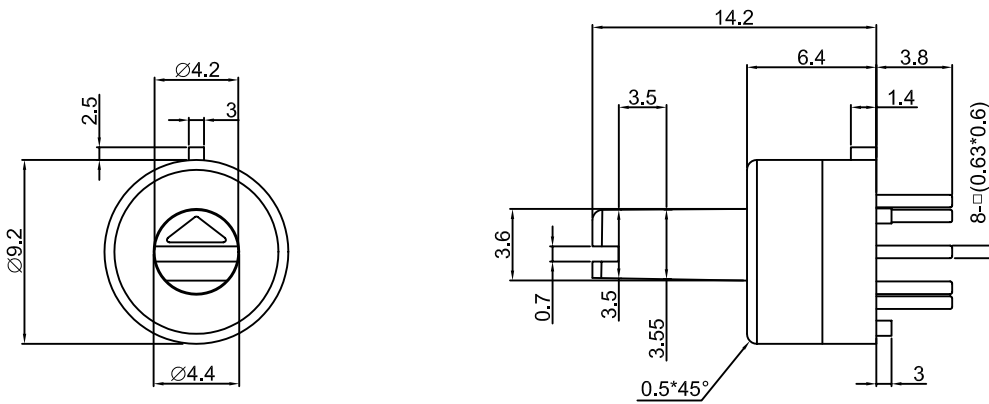

1. RATING : 24 V AC , 500 mA ; 48 V AC , 200 mA .
2. CONTACT RESISTANCE : 2 Ω MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN .
4. ROTATIONAL TORQUE : 180 g.cm MIN .
5. OPERATING LIFE : 2,000 CYCLES .
6. OPERATING TEMPERATURE RANGE : -20°C ~ 70°C .
7. POLE POSITION : 1P3T , 1P6T , 1P7T , MOMENTARY .

HOW TO ORDER

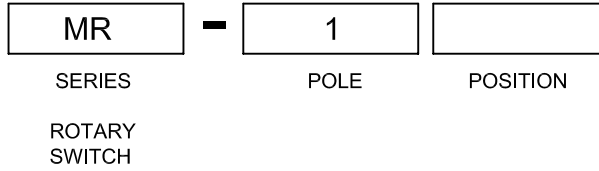

SCHEMATIC

P.C.B LAYOUT

TRAVEL	SWITCHING POSITION
45°	C - 1
90°	C - 2
135°	C - 3
180°	C - 4
225°	C - 5
270°	C - 6
315°	C - 7





ILLUSTRATION OF APPLICABLE POLE & POSITION

POLE	POSITION	POLE	POSITION
1	8	1	4
1	7	1	3
1	6	1	2
1	5		