

Ⓜ 65TS



专利号 PATENT NO.: ZL 02220684.1

瓷保险丝管(慢断型)

CERAMIC TUBE FUSE (SLOW-BLOW)

目录编号 CATALOG NO.	额定电流 CURRENT RATING	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² ·Sec.) (RoHS)
		UL(CUL)		UR(CUR)		PSE		KTL		
		H	L	H	L	H	L	H		
65TS-0500H/L	500mA	●	●					●		
65TS-0600H/L	600mA	●	●					●		
65TS-0630H/L	630mA	●	●					●		
65TS-0750H/L	750mA	●	●					●		
65TS-0800H/L	800mA	●	●					●		
65TS-010H/L	1A	●	●			●	●	●	0.836	
65TS-012H/L	1.2A	●	●			●	●	●	0.668	
65TS-013H/L	1.25A	●	●			●	●	●	0.731	
65TS-015H/L	1.5A	●	●			●	●	●	1.000	
65TS-016H/L	1.6A	●	●			●	●	●	1.901	
65TS-020H/L	2A	●	●			●	●	●	2.962	
65TS-025H/L	2.5A	●	●			●	●	●	5.470	
65TS-030H/L	3A	●	●			●	●	●	7.015	
65TS-032H/L	3.15A	●	●			●	●	●	7.825	
65TS-035H/L	3.5A	●	●			●	●	●	10.91	
65TS-040H/L	4A	●	●			●	●	●	15.78	
65TS-050H/L	5A	●	●			●	●	●	29.65	
65TS-060H/L	6A	●	●			●	●	●	53.95	
65TS-070H/L	7A	●	●			●	●	●	85.11	
65TS-080H/L	8A	●	●			●	●	●	134.3	
65TS-100H/L	10A	●	●			●	●	●	238.8	
65TS-120H/L	12A	●	●			●	●	●	382.5	
65TS-130H/L	13A	●	●			●	●	●	487.3	
65TS-150H/L	15A	●	●			●	●		666.8	
65TS-200H/L	20A			●	●				1811	
65TS-250H/L	25A			●	●				2586	
65TS-300H/L	30A			●	●				3006	

H DENOTES FOR 250V (H 表示 250V)

L DENOTES FOR 125V (L 表示 125V)

● DENOTES FOR APPROVED (● 表示已取得认证)

REMARK: APPROVALS OF 65TS-300H/L ONLY FOR PIGTAIL TYPE

备注: 65TS-300H/L 的认证仅为引线型产品

分断能力:

INTERRUPTING CAPACITY:

10,000 amperes at 125V AC (500mA-15A)

35 amperes at 250V AC (500mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-10A)

750 amperes at 250V AC (12A-15A)

400 amperes at 125V AC (20A-30A)

100 amperes at 250V AC (20A-30A)


500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (1A-15A) PSE


100 amperes at 250V AC (500mA-10A) KTL

电气特性 ELECTRICAL CHARACTERISTICS:

额定电流的% % of CURRENT RATING	熔断时间 BLOWING TIME
100%	最快4小时 4 hours Min.
135%	最慢1小时 1 hour Max.
200%	最慢120秒 120 seconds Max.




65TS



单位 Unit:mm

65TS(P)

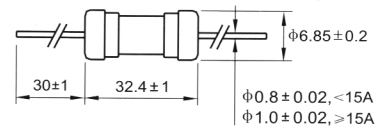

65TS 平均 I-T 曲线图 (仅供参考)

65TS AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE)

